

±0.05% Ultra High Accuracy




Power Analyzer 7140



Frequency | DC, 0.2Hz~100kHz Voltage | 800V Current | 30A

Supports Three Major Graphical Analysis Functions (Trend , Bar Chart, Waveform)

MICROTEST 7140 Power Analyzer not only provides numerical displays but also supports Waveform, Trend and Bar charts. Whether for real-time monitoring or long-term trend analysis, these graphical functions help engineers comprehensively analyze power-related parameters.

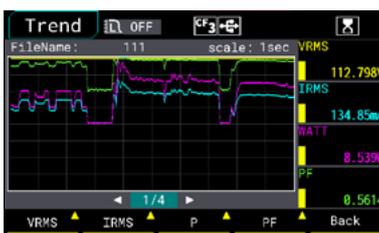


Trend Graph for Energy Evolution

As time progresses, energy changes often follow specific trends. The MICROTEST 7140's Trend function helps track long-term trends and short-term fluctuations, providing valuable insights into energy evolution over time.



Harmonic Analysis with Bar Chart

MICROTEST 7140 supports 100-order harmonic analysis and offers the option to display the results in a bar chart. This provides a more intuitive view of the relative strength or proportion of different harmonic components, helping to quickly identify the existing harmonic frequencies.

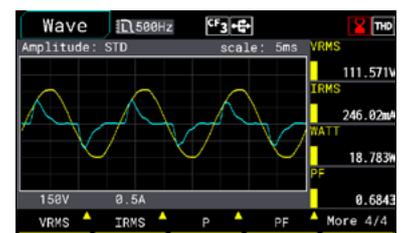

Waveform Graph for Real-Time Monitoring

The waveform graph function allows for a more intuitive observation of real-time fluctuations in power signals. By analyzing the curves of voltage and current variations, users can quickly detect any anomalies or periodic changes.


Unveiling Power's Secrets

Power Analyzer 7140

Auto Integration up to 10,000 Hours





with 100th Harmonic Analysis



Power Integration Mode

In Power Integration Mode, the MICROTTEST 7140/7130 accurately measures current integration (Ah) and energy (Wh) over a time range of up to 10,000 hours. It allows for long-term monitoring of equipment's energy consumption and current demand, making it ideal for durability testing of motors/rotating machinery. The instrument also supports data storage via the standard USB Host communication.

With its independent measurement modules, the instrument can simultaneously perform harmonic analysis and integration in any screen background, enabling real-time evaluation of harmonic effects in the system.

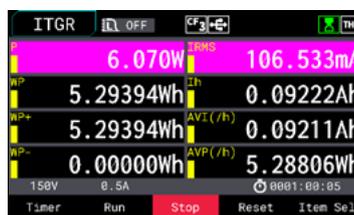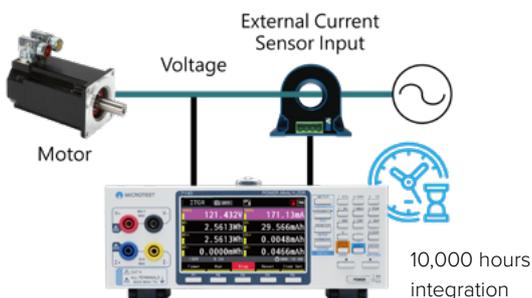


Power Analyzer/ Power Meter

7140
7130

Test Frequency
0.2Hz~100kHz

100th-order Harmonic Analysis

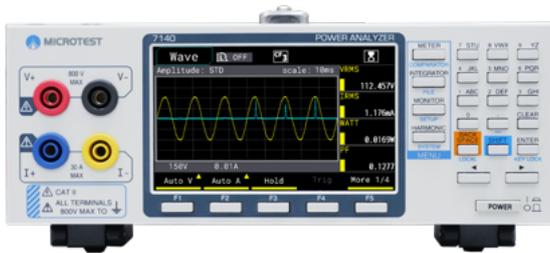

Automatic Testing Equipment

MICROTEST 7140 Power Analyzer is specifically designed for single-phase AC/DC power measurement and analysis. It offers a wide test bandwidth ranging from DC, 0.2Hz to 100kHz and features a high-speed 500kSPS sampling rate. With a basic power measurement accuracy of $\pm 0.05\%$, the compact unit is equipped with a 4.3" TFT LCD display, providing both numerical and graphical representations for precise power-related parameter measurements.

MICROTEST 7140 supports a rated direct input voltage of 800V and an input current of 30A, along with 100-harmonic analysis capability. Its independent measurement modules allow multiple tests to be executed simultaneously in any screen background. This enables harmonic analysis and integration measurement to be performed simultaneously, ensuring real-time power quality monitoring and comprehensive measurement data acquisition. This significantly enhances testing efficiency, making power analysis more precise and reliable.

For standby power consumption measurement, it supports a minimum 5mA current range and a power resolution of $10\mu W$. The rich graphical display interface includes waveform diagrams, bar charts, and trend graphs. In Meter mode, it can display 4/8/16 sets of parameters simultaneously while monitoring the maximum and minimum values of 4 or 8 parameter sets. Additionally, the comparison mode allows for PASS/FAIL judgments based on predefined upper and lower limits, meeting the measurement requirements of production lines, R&D, and quality control applications.

Extensive Parameter Measurement

- Voltage (VRMS/ VDC/ V+PK/ V-PK)
- Current (IRMS/ IDC/ I+PK/ I-PK)
- Frequency (VHZ/ IHZ)
- Power (P)
- Crest Factor (CFV/ CFI)
- Power Factor (PF)
- Apparent Power (S)
- Reactive Power (Q)
- Phase Angle (DEG)
- Total Harmonic Distortion (THDV/ THDI/ THDW)
- Maximum Current Ratio (MCR)
- Displacement Power Factor (DPF)

Application

Household Appliances | Refrigerators, washing machines, air conditioners, microwaves, etc.

Consumer Electronics | Laptops, tablets, servers, mobile phones, etc.

Industrial Equipment | Machinery, power tools, compressors, etc.

Power Equipment | Generators, transformers, inverters, etc.

New Energy Equipment | Solar power systems

Features

- Ultra-High Measurement Accuracy $\pm 0.05\%$
- High-Speed 500kSPS Sampling Rate
- Rated Direct Input Voltage: 800V / Input Current: 30A
- DC, 0.2Hz~100kHz Voltage/Current Measurement Bandwidth
- 100th-Order Harmonic Analysis (Numerical Display / Bar Graph Analysis)
- 4.3" Color Multifunctional Digital & Graphical LCD Display
- Three Graphical Display Modes (Waveform / Trend / Bar Graph)
- Automatic Integration up to 10,000 Hours with Simultaneous Harmonic Analysis
- Minimum Current Range of 5mA & Power Resolution of $10\mu W$
- Supports Comparison Mode with Upper/Lower Limit PASS/FAIL Judgment
- Automatic Switching Between Low and High Current Measurement Modes (Eliminates Manual Wiring)
- Simultaneous AC+DC Measurement and Display
- Supports External Current Sensor Input (High-Current Testing Solution)



Standard Interfaces

LAN

SIGNAL I/O

USB Device

RS-232

USB Host

Selection Chart

Power Measurement Solutions	7140 Power Analyzer	7130 Power Meter
Frequency Range	DC, 0.2Hz~100kHz	DC, 0.2Hz~100kHz
Basic Measurement Accuracy	±0.05%	±0.05%
Sampling Rate	500kSPS	500kSPS
Meter Mode	•	•
Harmonic Analysis	100th-order harmonic	50th-order harmonic
Voltage and Current Waveform Display	•	•
Power Trend Graph	•	-
Harmonic Bar Chart	•	-

Specification

Input

Measurement range	Voltage	Crest factor 3: 15V/ 30V/ 60V/ 150V/ 300V/ 600V Crest factor 6: 7.5V/ 15V/ 30V/ 75V/ 150V/ 300V	
	Current: Direct input	Crest factor 3: 5mA/10mA/20mA/50mA/100mA/200mA/0.5A/1A/2A/5A/10A/20A(Max30A) Crest factor 6: 2.5mA/5mA/10mA/25mA/50mA/100mA/0.25A/0.5A/1A/2.5A/5A/10A	
	Current: External current sensor input	Crest factor 3: 500mV/ 1V/ 2V/ 5V/ 10V	
Input impedance	Voltage	Input resistance:Approx. 1.66MΩ Input capacitance:Approx. 13pF (Parallel with the resistance)	
	Current: Direct input	Crest factor 3: 5mA/10mA/20mA/50mA/100mA/200mA Crest factor 6: 2.5mA/5mA/10mA/25mA/50mA/100mA	Input resistance:Approx. 500mΩ+10mΩ(wire) Input inductance:Approx. 0.1μH
	Current: External current sensor input	Crest factor 3: 0.5A/1A/2A/5A/10A/20A Crest factor 6: 0.25A/0.5A/1A/2.5A/5A/10A	Input resistance: Approx. 5mΩ + 3mΩ(wire) Input inductance: Approx. 0.1μH
Continuous maximum allowable input	BNC	Max AC 10V	
	Voltage	Peak value 1131V	
	Current	Crest factor 3: 5mA/10mA/20mA/50mA/100mA/200mA Crest factor 6: 2.5mA/5mA/10mA/25mA/50mA/100mA	Maximum current: 0.9A
		Crest factor 3: 0.5A/1A/2A/5A/10A/20A Crest factor 6: 0.25A/0.5A/1A/2.5A/5A/10A	Maximum current: 30A
Line filter	Select OFF or ON(cutoff frequency at 500Hz/5kHz/100kHz), THD ON(cutoff frequency at 500Hz/ 5kHz)		
Frequency filter	Select OFF or ON(cutoff frequency at 500Hz)		
A/D converter	Simultaneous conversion of voltage and current inputs Resolution: 16bits, Maximum conversion rate: 500kSPS		

Voltage and Current Accuracy

Voltage and Current Accuracy	Accuracy	DC	DC Accuracy ±0.05% reading ± 0.05% of range	
		0.2Hz f < 45Hz	±(0.1% of reading + 0.1% of range)	
		45Hz f 66Hz	±(0.05% of reading + 0.05% of range)	
		66Hz < f 1kHz	(0.1% of reading + 0.1 % of range)	
		1kHz < f 10kHz	±([(0.07×f)]% of reading] + 0.3% of range)	
		10kHz < f 100kHz	±(0.4 % of reading + 0.4 % of range)±[{0.04×(f-10)}% of reading]	
	Frequency range	Data update interval	Measurement Frequency Range	
		0.05s	40Hz ~ 100kHz	
		0.1s	20Hz ~ 100kHz	
		0.2s	10Hz ~ 100kHz	
		0.25s	8Hz ~ 100kHz	
		0.5s	5Hz ~ 100kHz	
		1s	2Hz ~ 100kHz	
		2s	1.5Hz ~ 100kHz	
		5s	0.5Hz ~ 100kHz	
10s~60mins	0.2Hz ~ 100kHz			

Active Power Accuracy

Active Power Accuracy	Requirements	Same as the conditions for voltage and current. Power factor: 1	
	Accuracy	DC	±(0.05% reading ± 0.05% of range)

Active Power Accuracy	Accuracy	0.1Hz f < 45Hz	$\pm(0.2\% \text{ of reading} + 0.2\% \text{ of range})$
		45Hz f 66Hz	$\pm(0.05\% \text{ of reading} + 0.05\% \text{ of range})$
		66Hz < f 1kHz	$\pm(0.1\% \text{ of reading} + 0.1\% \text{ of range})$
		1kHz < f 10kHz	$\pm(0.1\% \text{ of reading} + 0.2\% \text{ of range}) \pm \{[0.06 \times (f)]\% \text{ of reading}\}$
		10kHz < f 100kHz	$\pm(0.4\% \text{ of reading} + 0.4\% \text{ of range}) \pm \{[0.07 \times (f-10)]\% \text{ of reading}\}$

Voltage, Current, and Active Power Measurements

Voltage, Current, and Active Power Measurements	Measurement	Digital sampling method
	Crest factor	3 or 6
	Wiring system	Single-phase, two-wire (1P2W)
	Range select	Select manual or auto ranging
	Display mode switching	RMS, VOLTAGE MEAN, DC
	Measurement synchronization source	Select voltage, current, or the entire period of the data update interval for the signal used to achieve synchronization during measurement
	Line filter	Select OFF or ON (cutoff frequency at 500Hz, 5kHz, 100kHz)
	Peak measurement	Measures the peak (max, min) value of voltage, current, or power from the instantaneous voltage, instantaneous current, or instantaneous power that is sampled

Integration

Mode	Manual integration mode
Timer	Automatically stop integration by setting a timer Selectable range: 0h00m00s ~ 9999h59m59s(0h00m00s, automatically sets to manual integration mode)
Count overflow	WP: 999999MWh/-99999MWh, q: 999999MAh/-99999MAh
Accuracy	$\pm(\text{Power accuracy (or current accuracy)} + 0.05\% \text{ of reading})$ (fixed range) *In auto-range mode, measurement is not performed during range switching. The first measurement after switching and the non-measurement period are included in calculations
Range setting	Auto range or fixed range for Integration is available. *Refer to the "Voltage, Current, and Power Measurement" section for range switching.
Valid Frequency Ranges for Integration	Active power: DC to 100 kHz Current: DC to 100 kHz
Timer accuracy	$\pm 0.02\%$

Harmonic

Measured item	1~100 {Voltage, Current, Power, Voltage Ratio, Current Ratio, Power Ratio, Voltage Phase Angle, Current Phase Angle}, and all measurement items when THD is not enabled	
Method	PLL synchronization method with Discrete Fourier Transform for harmonic analysis	
Frequency range	Fundamental frequency of the PLL source is in the range of 20Hz ~ 480Hz	
PLL source	Select voltage or current of each input element	
DFT data length	4096	
Accuracy	20Hz f < 45Hz	$\pm(0.2\% \text{ of reading} + 0.2\% \text{ of range})$
	45Hz f 66Hz	$\pm(0.05\% \text{ of reading} + 0.05\% \text{ of range})$
	66Hz < f 1kHz	$\pm(0.1\% \text{ of reading} + 0.1\% \text{ of range})$
	1kHz < f 10kHz	$\pm(0.1\% \text{ of reading} + 0.2\% \text{ of range}) \pm \{[0.06 \times (f)]\% \text{ of reading}\}$
	10kHz < f 48kHz	$\pm(0.4\% \text{ of reading} + 0.4\% \text{ of range}) \pm \{[0.07 \times (f-10)]\% \text{ of reading}\}$

External Current Sensor Input

Measurement range	Crest factor 3: 0.5V/ 1V/ 2V/ 5V/ 10V
-------------------	---------------------------------------


General

Supply voltage	100VAC~240VAC, 50~60 Hz
Power consumption	30VA MAX
Display	4.3" TFT, 800*480
Remote Control Input/Output Signal	USB, RS-232, ETHERNET 10/100M
Memory	USB disk, Embed flash
Operating environment	Temperature: 13°C to 40°C Humidity: < 80%RH
Weight	2.9kg
Dimensions	214x115x300mm

Functions


Front-Facing Voltage/Current Input Terminals for Easy Connection

The voltage/current measurement input terminals adopt a front-facing design, enabling quick and convenient connection with the F71201 fixture box. The F71201 connection cables can be directly connected to the 7140 Power Analyzer, allowing DUTs (such as AC plugs) to be plugged into the fixture box for plug-and-play functionality, eliminating the hassle of manual wiring.

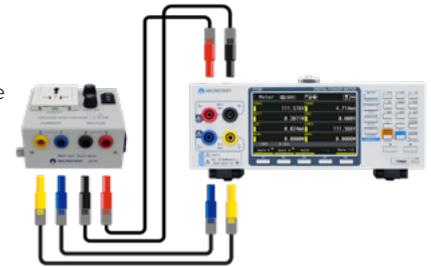

In Meter Mode, up to 4/8/16 sets of parameters can be displayed at once.

MICROTEST 7140/7130 features a 4.3" TFT LCD display with 5-digit measurement readout. In Meter mode, it can simultaneously show 4/8/16 sets of parameters. It offers ultra-high precision for voltage, current, and power measurements, achieving an accuracy of $\pm 0.05\%$ of the reading $\pm 0.05\%$ of the range.

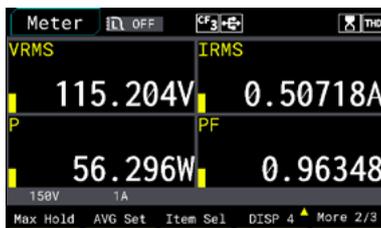

4-Parameter Display



8-Parameter Display



16-Parameter Display

Simultaneous Monitoring of Maximum and Minimum Values for 4/8 Parameters, with Built-in Oscilloscope Function


MICROTEST 7140/7130 is capable of simultaneously monitoring 4 or 8 parameters, displaying their maximum and minimum values. This helps engineers efficiently track fluctuations and variations in power-related parameters. Additionally, it supports graphical display and features a simple oscilloscope function to observe voltage and current waveforms. With its USB Host storage interface, users can directly capture waveform screenshots and record values without the need for an external oscilloscope.



Simultaneous Display of 4 Parameters



Simultaneous Display of 8 Parameters


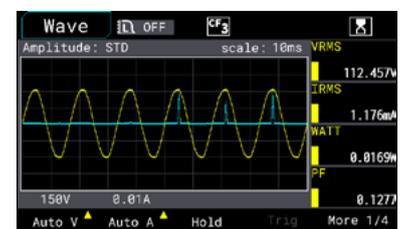


Waveform Display of Voltage and Current

Support Switching Between High and Low Current Measurement Modes – Eliminating Manual Wiring


Most power measurement instruments cannot automatically adjust wiring to compensate for the internal resistance of current and voltage meters, which affects power consumption measurements. Engineers typically need to use the correct wiring method (U-I / I-U wiring) to ensure precise standby power measurement.

The MICROTTEST 7140/7130 supports manual switching between high and low current measurement modes (when used with the F71201 test fixture and for currents below 15A), eliminating the need for manual rewiring and improving measurement efficiency.

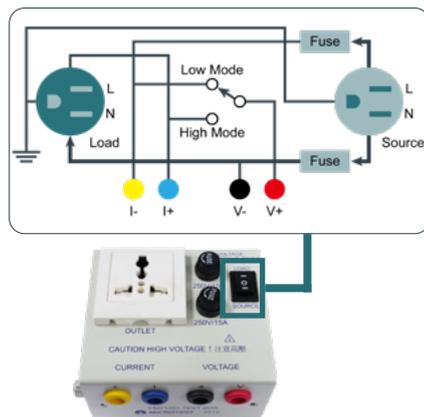

High-Current Mode

When measuring high-current products, the F71201 test fixture allows switching to high-current mode. The voltage measurement point is directly connected to the DUT (Device Under Test) to prevent voltage drop in the wiring loop, ensuring accurate power measurement without underestimation caused by high-current load conditions.




Low-Current Mode

When measuring low standby power products, switching to small current mode automatically compensates for the 7140/7130 voltage input internal resistance of 1.66MΩ, ensuring that the measured power approaches 0W. This feature is particularly useful for standby power evaluation, providing high accuracy in ultra-low power measurements.




Example: Measuring Standby Power Consumption of a Charger in No-Load Condition

When testing the standby power consumption of a charger, the power generated is very small due to the extremely low current value. To ensure accurate measurement of the charger's low standby power consumption, it is essential to use the correct wiring method and appropriate current range. This ensures precision in detecting such a minimal power draw.

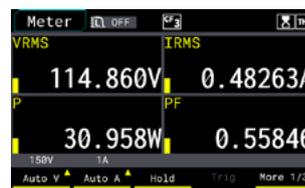

High-Current Mode

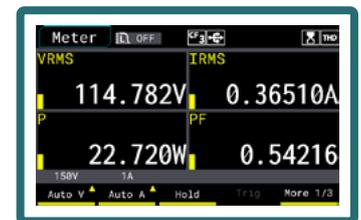


Low-Current Mode

By switching to Low-Current Measurement Mode through the F71201 test fixture, the power consumed by the 1.66MΩ voltage input internal resistance is automatically deducted. The system also automatically switches to the low current range for testing, accurately measuring the standby power consumption of the charger as 0.0095W, which is much closer to the actual value.

Up to 100-Order Harmonic Analysis with Odd and Even Harmonics Display

MICROTEST 7140 Power Analyzer meets the harmonic measurement requirements of IEC61000-4-7 standards, supporting harmonic analysis up to 100 orders. The measurement results can be displayed as either numerical values or bar charts, allowing for precise analysis of key harmonic parameters such as voltage, current, power, voltage distortion percentage, power distortion percentage, voltage phase angle, and current phase angle.

The instrument uses independent measurement modules, allowing engineers to simultaneously perform harmonic analysis and integration, enabling real-time monitoring and analysis.

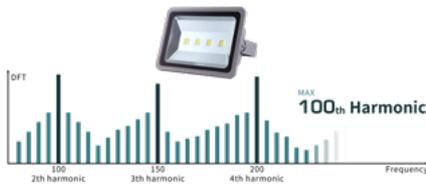

Ord	V(V)	V(C)	V(A)	I(A)	I(C)	I(P)	P(W)	P(C)
91	0.021	0.0	21.0	0.295	2.7	108.6	0.0000	0.0
92	0.011	0.0	38.9	0.153	1.4	48.7	0.0000	0.0
93	0.024	0.0	4.1	0.225	2.0	18.3	0.0000	0.0
94	0.005	0.0	62.7	0.063	0.6	37.5	0.0000	0.0
95	0.015	0.0	-5.4	0.588	4.6	8.1	0.0000	0.0
96	0.009	0.0	95.5	0.027	0.2	79.4	0.0000	0.0
97	0.009	0.0	18.8	0.351	3.2	57.1	0.0000	0.0
98	0.010	0.0	67.8	0.162	1.5	68.4	0.0000	0.0
99	0.011	0.0	9.6	0.369	3.3	140.2	0.0000	0.0
100	0.009	0.0	17	0.226	2.0	76.1	0.0000	0.0
DPF		-0.8	Ord 100	5.78W	Q	1.637var	PTHD	0.9%

In harmonic analysis mode, engineers can choose to display "odd-order harmonics" or "even-order harmonics." Focusing on odd-order harmonics helps quickly identify issues such as nonlinear loads or voltage distortion, allowing for precise pinpointing of factors affecting power quality. Filtering even-order harmonics is effective for diagnosing potential risks such as load imbalance or equipment aging, simplifying data analysis and enabling engineers to quickly get to the root of the issue.

Model	7140	7130
Harmonic Analysis	100th Harmonic (100th Harmonic Order)	50th Harmonic (50th Harmonic Order)

Numeric Mode

Ord	V(V)	V(C)	V(A)	I(A)	I(C)	I(P)	P(W)	P(C)
1	114.302	100.0	114.4	11.194	100.0	0.0	-0.0458	100.0
2	3.312	2.9	85.4	1.188	10.3	-39.6	0.0000	0.0
5	0.668	0.6	2.9	0.160	1.4	-8.9	0.0000	0.1
7	1.388	1.1	36.3	1.147	10.2	140.4	0.0000	0.0
9	0.701	0.6	155.9	0.786	7.0	176.5	0.0000	0.0
11	0.390	0.3	-7.7	0.525	4.7	-161.2	0.0000	0.0
13	0.098	0.1	128.6	0.196	1.7	159.4	0.0000	0.0
15	0.323	0.3	-171.3	0.264	5.0	-93.4	0.0000	0.0
17	0.298	0.3	-24.5	0.430	3.8	39.3	0.0000	0.0
19	0.189	0.2	154.7	0.514	4.6	87.0	0.0000	0.0
DPF		-0.8	Ord 100	2.17W	Q	1.600var	PTHD	0.9%

Ord	V(V)	V(C)	V(A)	I(A)	I(C)	I(P)	P(W)	P(C)
1	114.186	100.0	114.3	10.389	100.0	0.0	-0.0231	100.0
2	0.036	0.0	-158.1	0.051	0.5	-35.9	0.0000	0.0
3	3.364	2.9	85.0	1.242	11.3	100.8	0.0000	2.8
4	0.040	0.0	-147.9	0.131	1.2	156.0	0.0000	0.0
5	0.686	0.5	0.1	0.326	3.0	-36.8	0.0000	0.6
6	0.021	0.0	-110.8	0.107	1.0	89.3	0.0000	0.0
7	1.290	1.1	35.6	0.306	8.2	137.9	0.0000	0.1
8	0.033	0.0	-99.7	0.023	0.2	-35.3	0.0000	0.0
9	0.700	0.6	152.9	0.847	7.7	159.7	0.0000	0.1
10	0.016	0.0	154.7	0.142	1.3	-119.8	0.0000	0.0
VRMS		114.28V	IRMS	14.12mA	P	-0.04W	PF	-0.026
150V		0.05A	Harmonic	All	More 1/4			

Even Harmonic Analysis Display

Harmonics at Odd Multiples of the Rated Frequency (Fundamental Frequency)

Evaluating the Impact of Non-Linear Loads on the System

Ord	V(V)	V(C)	V(A)	I(A)	I(C)	I(P)	P(W)	P(C)
1	114.224	100.0	114.3	10.986	100.0	0.0	-0.0525	100.0
3	3.307	2.9	85.9	1.374	12.5	-99.3	0.0000	14.0
5	0.572	0.5	5.3	0.241	2.2	-51.8	0.0000	0.2
7	1.194	1.0	37.6	0.888	8.1	-128.7	0.0000	0.1
9	0.676	0.6	152.7	0.742	6.8	-176.3	0.0000	0.0
11	0.391	0.3	-5.8	0.529	4.8	-149.6	0.0000	0.0
13	0.078	0.1	135.6	0.135	1.2	145.8	0.0000	0.0
15	0.319	0.3	-129.7	0.025	4.8	-98.3	0.0000	0.0
17	0.288	0.3	-30.5	0.491	4.5	19.1	0.0000	0.0
19	0.199	0.2	-130.1	0.439	4.0	64.2	0.0000	0.1
VDC		-0.5V	IDC	0.10mA	CFV	1.409	CFI	5.000
150V		0.05A	Harmonic	Odd	More 1/4			

Displaying Odd-Order Harmonic Analysis

Harmonics with Even Multiples of the Rated Frequency (Even-Order Harmonics)

Identifying Potential Asymmetry or Specific Equipment Issues

Graphical Mode



Viewing Voltage, Current, and Power Harmonics Analysis Using a Bar Graph



Effective Analysis of AC Power Parameters with DC Characteristics in Voltage/Current

Due to grid fluctuations, the waveform of AC power may not always be a perfect sine wave. When measuring AC parameters, the MICROTTEST 7140/7130 can simultaneously display the DC component within the AC voltage and current data. This provides a more comprehensive view of power quality, assisting engineers in optimizing and analyzing power supply designs.



Moving the Timeline for More Flexible Trend Analysis, Quickly Focusing on Specific Moments or Sections

MICROTTEST 7140 Power Analyzer supports trend chart analysis, allowing for a more intuitive view of how power parameters change over time through the timeline. This feature enables engineers to quickly and accurately pinpoint data variations at specific moments.

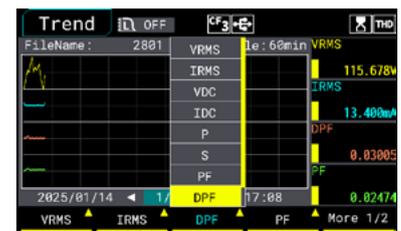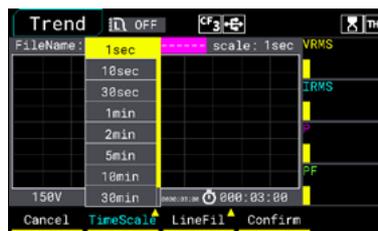

- Transient Division
- Trend Prediction and Diagnosis
- Efficiency and Performance Verification
- Comparative Analysis
- Data Logging and Reporting

Configurable Time Range


Sec	Min
1/ 10/ 30	1/ 2/ 5/ 10/ 30/ 60

Configurable Output Parameters
(Up to 4 Sets at a Time)


Output Parameters
VRMS/ IRMS/ VDC/ IDC/ PF/ DPF/ P/ S

Automatic PASS/FAIL Judgment

MICROTTEST 7140/7130 supports Comparison Mode, allowing users to set upper and lower limit values. This feature is ideal for production line testing, where it can automatically perform PASS/FAIL judgment for multiple parameters, such as voltage, current, and power, based on the defined limit values.

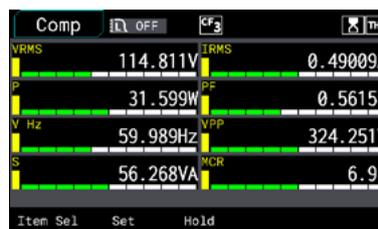


PASS-Displayed in green

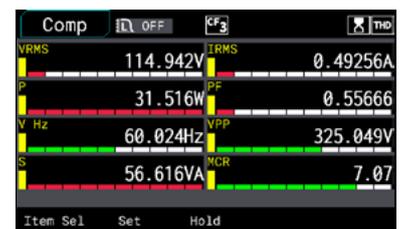


FAIL-Displayed in red

Circuit and Frequency Filtering Function

With the MICROTTEST 7140/7130 supporting filtering functions, unwanted frequencies in the signal can be filtered out during measurement, leaving only the signals within the target frequency range. This results in cleaner waveforms and more precise measurements of important power-related parameters in power systems.

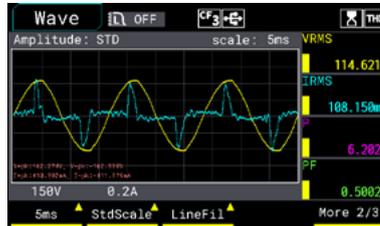


Before Filtering

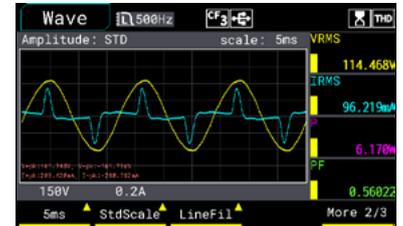

After Filtering (500Hz)

Current Sensor Input

MICROTTEST 7140/7130 provides a maximum input of 800V and 30A. For current measurement needs exceeding 30A, voltage input-type current clamps or current sensors can be purchased for testing.

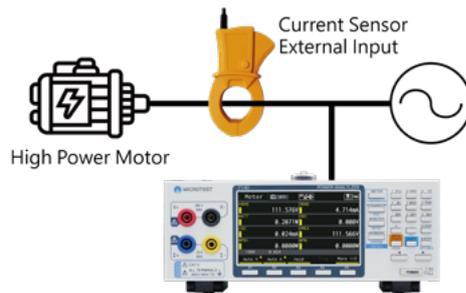

High Current Measurement Solution

Clamp-on Transformer



AC 100A/ 1V

Bandwidth 5kHz

Current Sensor




AC 500A/ 4V


Bandwidth 50kHz

Automatic Chassis Dimension

- Dimension (mm)

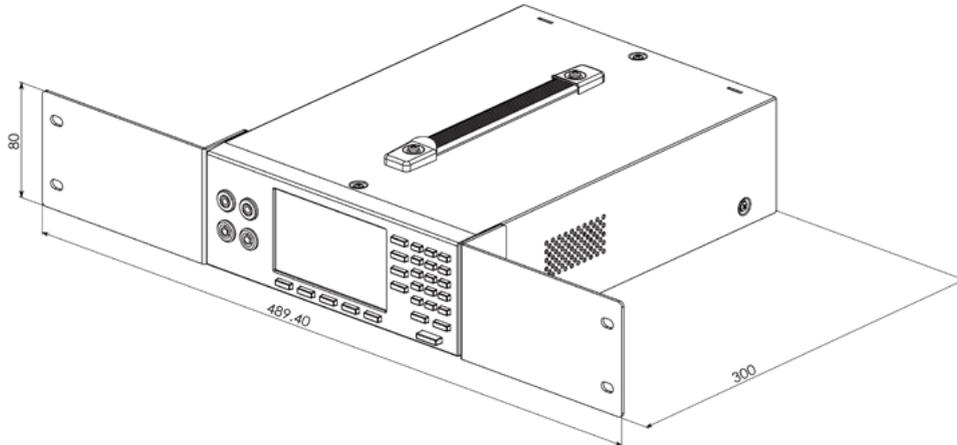

Appearance

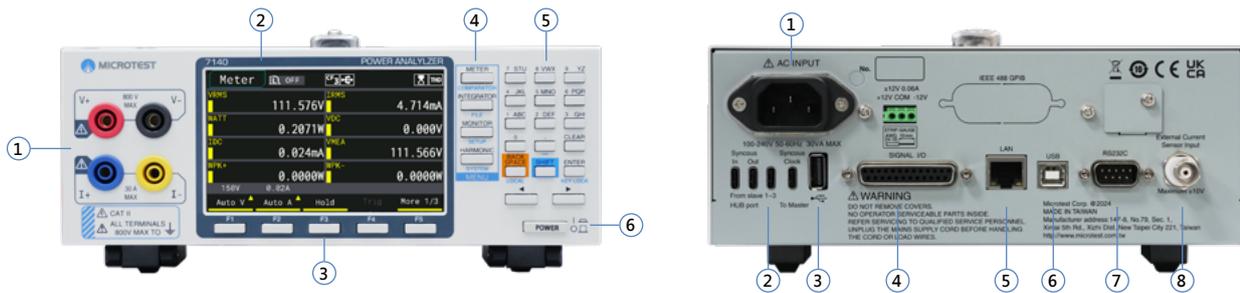

- | | |
|-----------------------------------|-----------------|
| 1. Voltage/Current Input Terminal | 4. Menu Keys |
| 2. LCD screen | 5. Numeric Keys |
| 3. Function keys | 6. Power Switch |

- | | |
|-------------------|---------------------|
| 1. Power jack | 5. LAN |
| 2. TYPE-C Syncous | 6. USB Device |
| 3. USB Host | 7. RS232 |
| 4. SIGNAL I/O | 8. External Current |

Ordering Information

7140/7130	Standard	Optional
<ul style="list-style-type: none"> • 7140 Power Analyzer (100th-order harmonic) • 7130 Power Meter (50th-order harmonic) 	<ul style="list-style-type: none"> • TL-PM0001 Test Cable-Red (100cm) • TL-PM0002 Test Cable-Black (100cm) • TL-PM0003 Test Cable-Blue (100cm) • TL-PM0004 Test Cable-Yellow (100cm) • Power Cord 	<ul style="list-style-type: none"> • F71201 Test Box • TL-000006 Ethernet Cable (150cm) • TL-000007 USB Cable (180cm I Type-A TO Type-B) • AX-PM0001 Test Probe-Red • AX-PM0002 Test Probe-Black • AX-PM0003 Alligator Clips-Yellow • AX-PM0004 Alligator Clips-Blue • TL-000014 D-Sub Cable-25M TO 25M (180cm) • Grove Hall Sensor (AC 500A/ 4V) • Current Transformer (AC 100A/ 1V)

Fixture & Accessories

F71201
Test Box



TL-000006
Ethernet Cable



TL-000007
USB Cable



Applicable models	7140/ 7130	7140/ 7130	7140/ 7130
Accessory Description	Test Box	150cm	Type-A TO Type-B I 180cm

TL-PM0001
Test Cable



TL-PM0002
Test Cable



TL-PM0003
Test Cable



Applicable models	7140/ 7130	7140/ 7130	7140/ 7130
Accessory Description	Red I 100cm	Black I 100cm	Blue I 100cm

TL-PM0004
Test Cable



AX-PM0001
Test Probe



AX-PM0002
Test Probe



Applicable models	7140/ 7130	7140/ 7130	7140/ 7130
Accessory Description	Yellow I 100cm	Red	Black

TL-000014
D-Sub Cable



AX-PM0003
Alligator Clips



AX-PM0004
Alligator Clips



Applicable models	7140/ 7130	7140/ 7130	7140/ 7130
Accessory Description	180cm I 25M TO 25M	Yellow	Blue

Grove Hall Sensor



Current Transformer



Applicable models	7140/ 7130	7140/ 7130
Accessory Description	AC 500A/ 4V	AC 100A/ 1V

DISTRAME