



## PROGRAMMABLE DC ELECTRONIC LOAD

### MODEL 63200 SERIES

Chroma's 63200 series of programmable electronic loads are designed to a wide variety of dc power conversion products including; DC power sources, battery chargers, server power supplies, dc-dc converters, batteries and many others. The high power rating, parallel and synchronization capabilities, and the ability to provide up to 2.7 times of rated power for short duty cycle loading make 63200 series especially well-suited for high power applications such as switch-mode rectifiers and discharging of batteries packs and fuel cells.

The 63200 series offers 11 different models with power ranges from 2600 watts to 15600 watts, currents from 50A to 1000A and operating voltages from 0 to 1000V. By paralleling modules very large systems can be assembled existing 93.6KW. Four operating modes provide different load simulations methods designed for various applications. The CC/CR modes are designed to test constant voltage power supplies and converters. CV mode simulates the battery for testing battery chargers and current sources, and CP mode is ideal for battery testing by simulating the real discharge profiles.

The 63200 series can sink rated current down to 1VDC even under the highest specified rise time. This unique feature guarantees the best

loading performance for low voltage/high current applications. With it's unique external waveform simulation and Master / Slave control capability, the 63200 series electronic loads allow users to parallel and synchronize more than one load together using an internal or external loading control signal. This feature provides unlimited load simulation and increased power.

The 63200 series also provides necessary measurement functions and short circuit simulations that extend the test capability for the most demanding engineering and automated test applications.

With front LCD displays and rotary knob, the 63200 loads offer versatile bench top operation. Users are also able to control the loads remotely via GPIB or RS-232C interface or with a USB adapter. Complex waveforms can also be created by driving the loads from an analog programming source (i.e. function generator).


Chroma 63200 loads incorporate built-in fan speed control to minimize audio noise. The self-diagnosis routines, built-in protection against OC, OP, OT, and alarm indicating OV reverse polarity to ensure safe operation and reliability.

## Programmable DC Electronic Load

### MODEL 63200 SERIES

#### Key Features :

- Power Rating :  
2600W, 5200W, 6500W, 10400W,  
14500W, 15600W
- Voltage range : 0 ~ 80V/0 ~ 600V/0 ~ 1000V
- Current range : Up to 1000A
- CC, CR, CV, CP load modes
- Master/Slave paralleling control mode,  
allow synchronous load control under  
static and dynamic loading mode  
(Up to 93.6kW)
- Dynamic loading : Up to 20kHz
- Only need 1V to draw rated current
- Programmable slew rate, up to 41A/μs
- Measurement : Voltage/Current/  
Power/Resistance
- Large LED/LCD display
- External loading waveform simulation
- Short circuit simulation and short  
circuit current measurement
- Full protection : OC, OP, OT protection  
and OV, reverse alarm
- Versatile remote controller
- GPIB & RS-232C interfaces
- Surge load capability
- Battery discharge timer

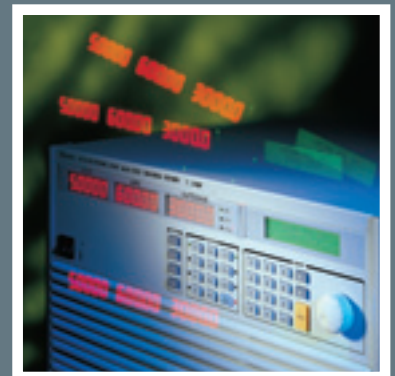


# Chroma



## APPLICATION SPECIFIC LOAD SIMULATION

Chroma's 63200 series electronic loads provide constant current, constant resistance, constant voltage and constant power modes.


The CC and CR mode load simulation is helpful to test whether the output voltage of the UUT remains stable or regulated under different load conditions. For battery chargers, CV mode may help to change the output voltage of a charger and therefore can test if the battery charger has the correct charging current corresponding to its own output, or more precisely, the battery voltage. If the UUT is a battery, the electronic load is able to simulate the behavior of the device that uses the battery. For many of the battery discharge applications, power consumption patterns need to be analyzed. The constant power or CP mode is ideal for these applications.

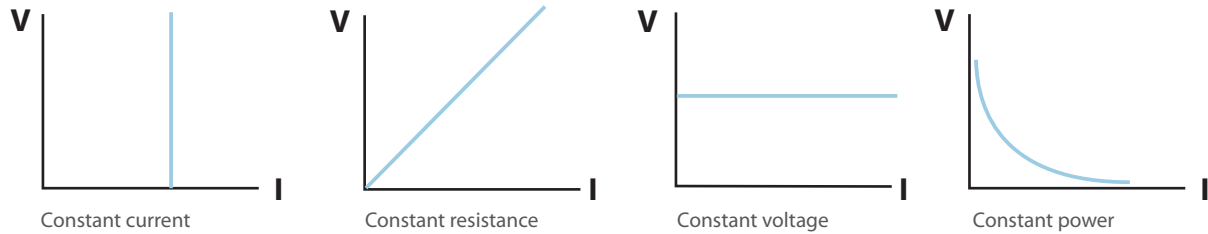

## LOW VOLTAGE OPERATING CHARACTERISTICS

For low voltage/high current applications, the 63200 series is available with a low voltage, which provides ultra-low voltage operation and in many cases can compensate for large voltage loss in the input wiring.

The 63200 series loads use a current close loop design connecting all power MOSFET devices in parallel to insure high accuracy load control with minimal drift (less than 0.15% of the current setting). The MOSFET technology keeps the input impedance to a minimum and enables the load to draw very high current even at very low voltages. For example, the model 63209 is capable of drawing 1000A at only 1V input.

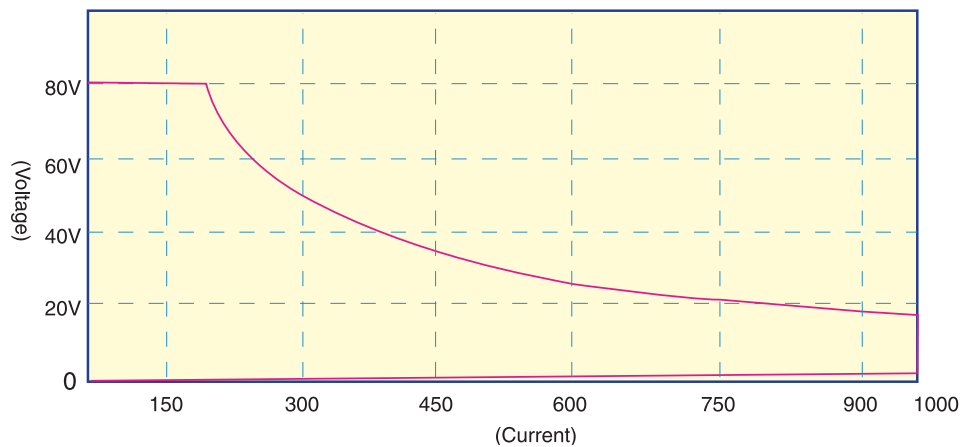


Model 63209(15600W) Input Characteristics

## MEASUREMENTS

The Chroma 63200 series loads have a built-in 15-bit precision A/D converter that can achieve 0.05%+0.05% F.S., 0.01%+0.1% F.S. and 0.03%+0.3% F.S. accuracy for voltage, current, and power measurements respectively. These measurements can be displayed simultaneously on three big LED readouts for convenience. In addition to standard measurements, the 63200 series also provides voltage and current monitor outputs, which are useful when the user needs to monitor the voltage and current waveform via a scope.


## DYNAMIC LOADING AND CONTROL

Modern electronic devices operate at very high speeds; therefore, it is important for an electronic load to perform well during the transient and dynamic testing. To satisfy these testing applications, the 63200 loads offer outstanding high speed, programmable dynamic load simulation and control capabilities. The figure below shows the programmable parameters of the 63200 load modules. The programmable slew rate makes the simulation of transient load changes demanded by the requirement of real life application possible. The internal waveform generator of the 63200 is capable of producing a maximum slew rate of  $25\text{A}/\mu\text{s}$  (63208), and dynamic cycling up to  $20\text{kHz}$ . Its dedicated remote load sense and control circuitry guarantee the minimum waveform distortion during continuous load changes.

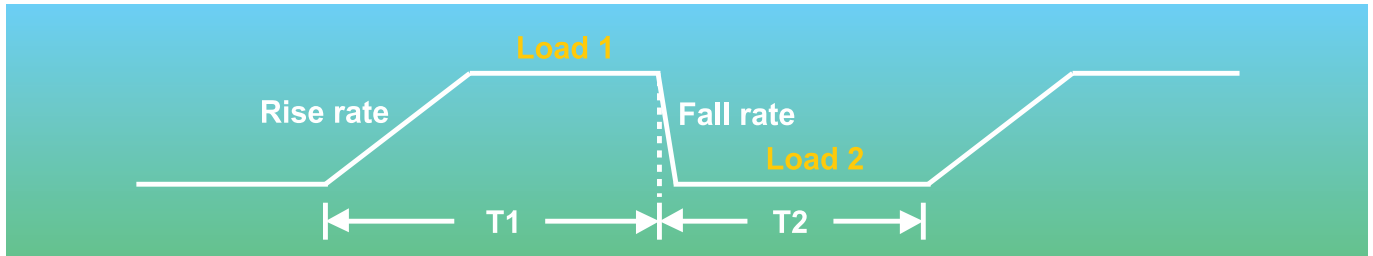

## MASTER / SLAVE PARALLEL CONTROL

When higher power is required, it is common to parallel two electronic loads together to draw higher current. The 63200 series high power loads have a smart Master/Slave control mode. When the loads are set to Master/Slave mode, users can program the loading (CC mode only) on the master unit. The loading current values of the slave unit(s) will be calculated and downloaded by the master unit automatically. In short, unlike traditional designs, users now have the option of operating several loads in Master/Slave mode as a single load unit.

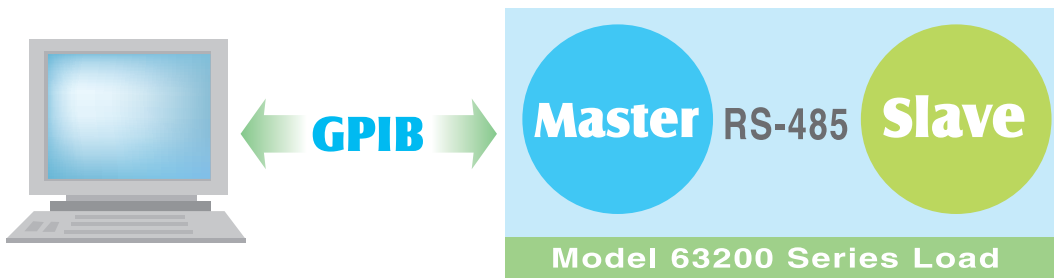

## EXTERNAL LOADING WAVEFORM SIMULATION

The 63200 series electronic loads can be controlled by an external analog control signal, which is generated by any kind of signal or an arbitrary waveform generator. This makes it capable of simulating any loading waveform observed in the field within the load specifications.



## SHORT CIRCUIT SIMULATION

Chroma's 63200 series electronic loads can also simulate a short circuit condition. The load can short a DC power source or any power supply that has a built in current limit function and measure its short circuit current so that users can verify if the UUT current limit is functional.

## SURGE LOAD CAPABILITY

Chroma's 63200 Series DC Loads provide a unique surge load capability which allows users to overdrive the loads up to 2.7 times their rated power for short periods. This feature is ideal when the average power required by the UUT is low compared to short-term peak power demands. Plasma Display Panel (PDPs) testing is one of the typical applications, others include battery 3C discharge, breaker & fuse over rating (300% to 1000%) tests, car engine startup simulation and DC motor startup simulation.

The amount of surge loading available using the 63200 loads is related to the initial loading conditions. Figures 1 and 2 show the relationship of the initial state (Load\_Low under Dynamic mode) and the maximum acceptable overdrive power. Under this operation, the load will display an Over Power Protection Alarm (OPP) and will disable the load current if the user violates the maximum surge load capability showed in the figures.

### Note 1 :

The Initial state under Static Mode should last at least 1 second.

### Note 2 :


This surge load capability will be regulated by the temperature de-rating characteristics. (Refer to Note 1 in Specifications)

### Note 3 :

Examples below assume the use of the Model 63201 load with a continuous rating of 2600W/300A/1-80VDC


### Note 4 :

Model 63211 does not support this feature.

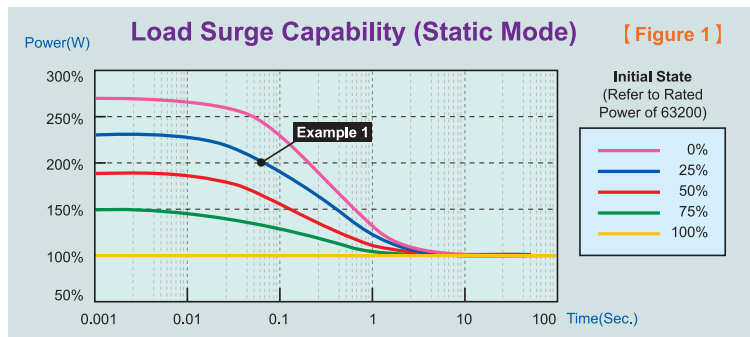

### Example 1: STATIC LOADING

The Model 63201 can be overdriven to approximately 5200W (200% of its rated continuous power rating) for 6.0 ms when the starting power is 650W (25% of its rated power). This is represented by DOT on the blue curve in Figure 1.

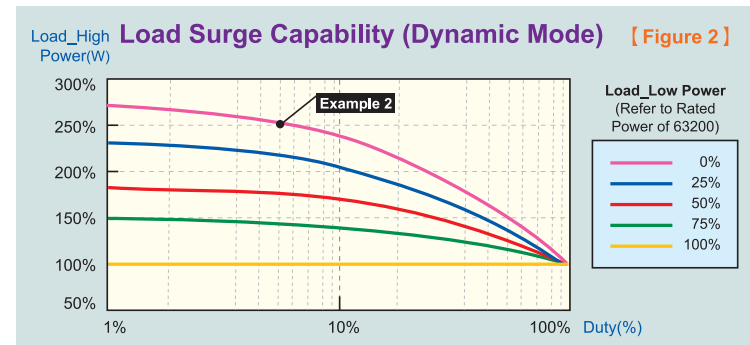


### Example 2: DYNAMIC LOADING

The Model 63201 is capable of a zero - to- 6500W (250%) pulse at a duty cycle of 5%. This is represented by the DOT on the purple curve in Figure 2.

## TIMER FUNCTION FOR BATTERY DISCHARGE TESTING

The 63200 loads include a unique timing and measurement function. This allows for precision time settings and measurements in the range of 1s to 99999s. This feature also allows users to set a final voltage and timeout value for battery discharge testing and similar applications. For example, the figure to the right shows that the 63200's internal timer can be initiated automatically when starting to load on. The timer will stop counting until the preset voltage value is reached.

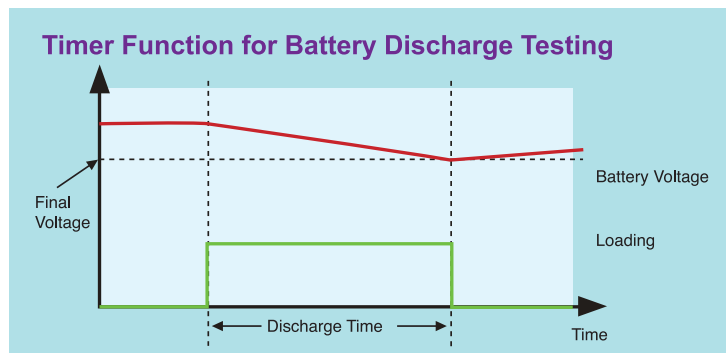

## APPLICATIONS

### Power Supply Testing

Power supplies have played a critical role in electrical and electronic devices. They have diversified into several different configurations for various applications. For example, AC/AC power supplies are used for UPS and AVR, AC/DC power supplies are used for server power supplies, and DC/AC power supplies are used for inverters that transfer battery power to AC for home appliances. Lastly, DC/DC converters are widely used in battery powered devices such as cellular phones and laptop computers. With four different load modes, Chroma 63200 series electronic loads are capable of testing many different DC output power supplies directly or via a rectifier. They can also be used to test AC output power supplies.




### Electronic & Electrical Devices Testing

Almost all modern electronic equipment have a built in power supply. Therefore, a DC electronic load is an important instrument for these devices during the R/D and Q/A phases. For example, A/D, D/D and D/A stages are normally integrated in a UPS. The Chroma 63200 electronic loads are helpful in testing the internal A/D and D/D boards of a UPS.



### Battery Testing

For most applications, power consumption patterns are constant power. Therefore, the CP mode of the 63200 series electronic load is ideal to use as a discharge load for battery testing.

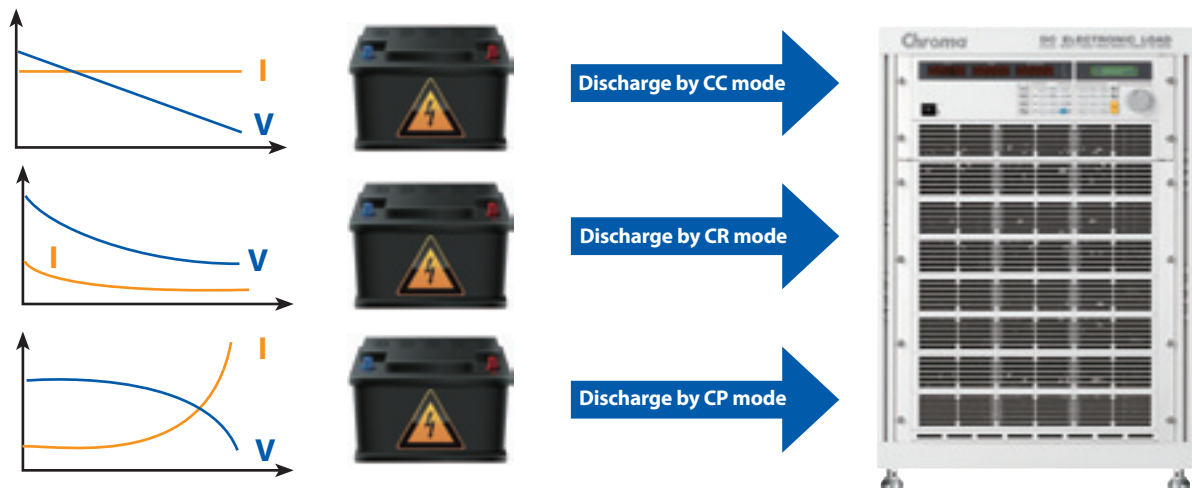

### System integration

Chroma 63200 series electronic loads provide GPIB, RS-232C and RS-485 PC controllable interfaces. The external waveform simulation and voltage / current monitoring capability make Chroma 63200 series ideal for automatic system integration.

## SOFTPANEL


The 63200 series can be operated from the front panel and controlled by the softpanel. The user friendly software includes all the functions of 63200 series and is easy to understand and operate. The 63200 series can be configured with GPIB, RS-232C interfaces as an option for remote control and automated testing applications.




Main Operation Menu



Sequence Test

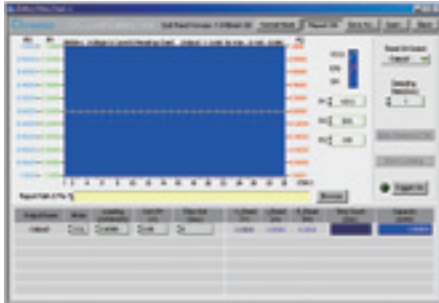

Battery Discharge Test

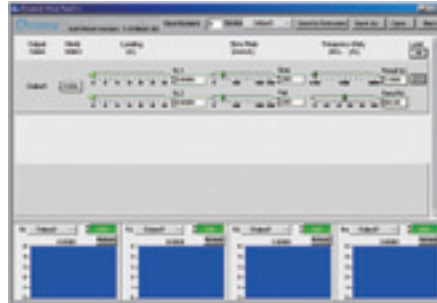


Dynamic Test




OCP Test

## PANEL DESCRIPTION

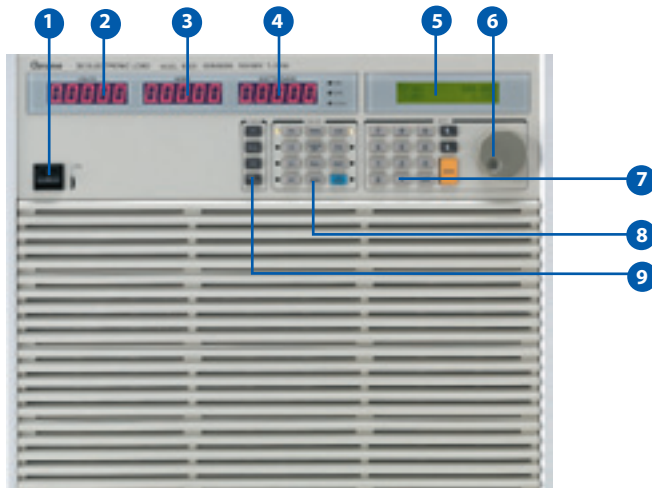

Model: 63203, 63204

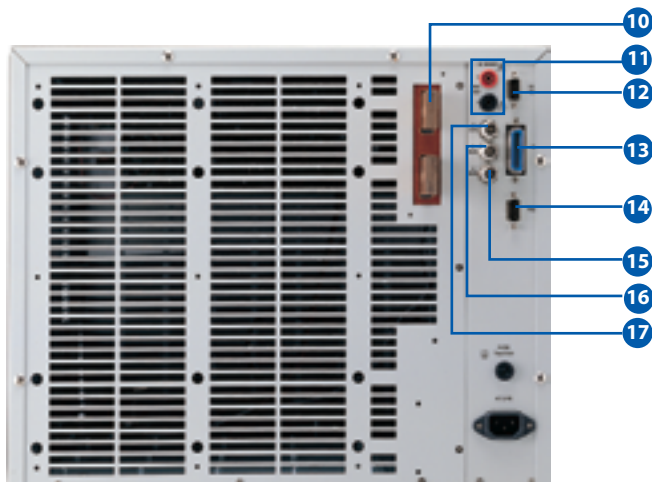


1. **Power Switch**
2. **LED Display:**  
Voltage read back
3. **LED Display:**  
Current/ ohm read back
4. **LED Display:**  
Power read back
5. **LCD Display:**  
For setting and editing
6. **Rotary knob:**  
To adjust the loading and parameter setting
7. **Numeric key:**  
For data setting
8. **Function key:**  
To select load mode, control mode, and define the reading specification
9. **System key:**  
For system config and data store, recall
10. **Load terminal**
11. **Voltage sense terminal**
12. **RS-485 connector**
13. **GPIB connector**
14. **RS-232C connector**
15. **Voltage monitor output:**  
Analog output which indicates the voltage waveform
16. **Current monitor output:**  
Analog output which indicates the current waveform
17. **External V reference:**  
External programming voltage input

## LOW VOLTAGE & V-I CURVE OPERATING CHARACTERISTICS (TYPICAL) OF 63200 SERIES


### V-I Curve :

Model 63201/ 63203/ 63205/ 63206/ 63207/ 63208/ 63209

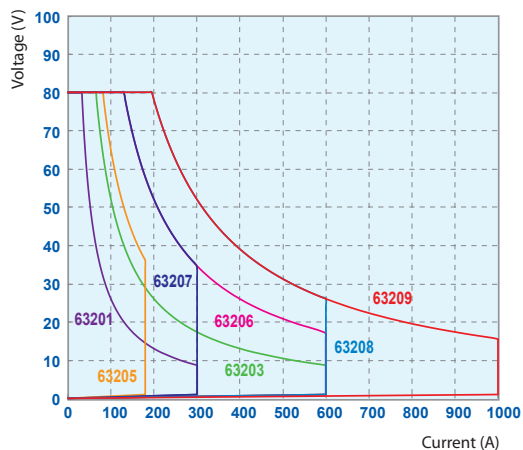


### V-I Curve :

Model 63202/ 63204/ 63210/ 63211

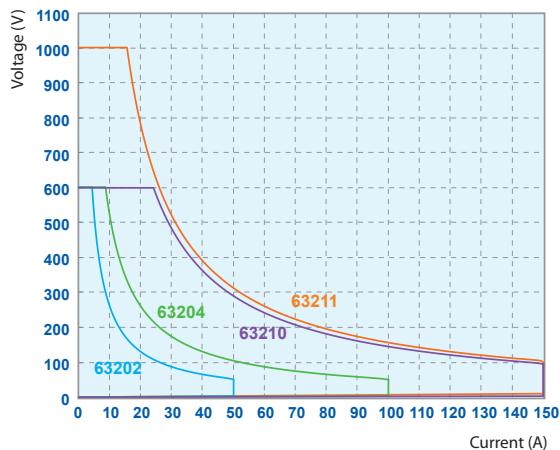


### Low Voltage Operating :

Model 63201/ 63203/ 63205/ 63206/ 63207/ 63208/ 63209

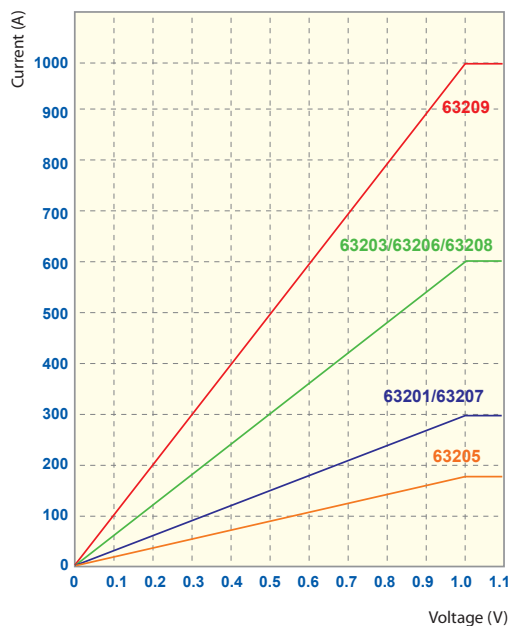

### Low Voltage Operating :

Model 63202/ 63204/ 63210/ 63211

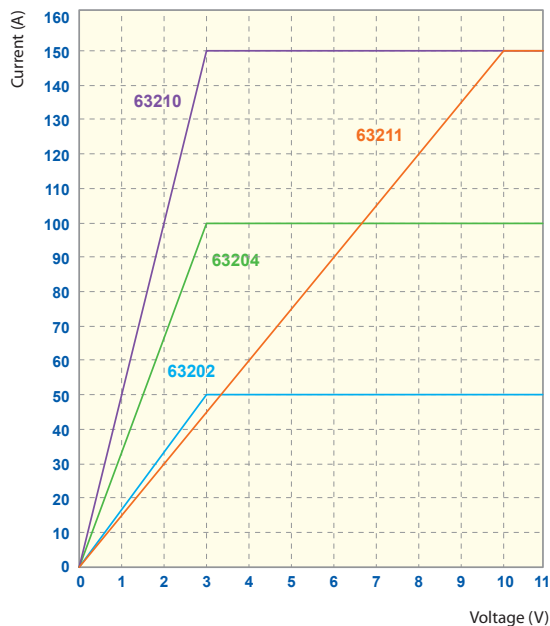

**Note:** All specifications are measured at load input terminals. (Ambient temperature of +25°C)

Model 63208 / 63209 / 63210

Model 63211



Model 63201 / 63202

Model 63203 / 63204

Model 63205

Model 63206 / 63207

## SPECIFICATIONS-1

| Model                    | 63201                                                                                        |               | 63202                                                                                        |               | 63203                                                                                        |               |
|--------------------------|----------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|---------------|
| Power *1                 | 260W                                                                                         | 2600W         | 260W                                                                                         | 2600W         | 520W                                                                                         | 5200W         |
| Current                  | 0~30A                                                                                        | 0~300A        | 0~5A                                                                                         | 0~50A         | 0~60A                                                                                        | 0~600A        |
| Voltage *2               | 0~80V                                                                                        |               | 0~600V                                                                                       |               | 0~80V                                                                                        |               |
| Min. Operating voltage   | 0.5V @ 15A                                                                                   | 0.5V @ 150A   | 1.5V @ 2.5A                                                                                  | 1.5V @ 25A    | 0.5V @ 30A                                                                                   | 0.5V @ 300A   |
|                          | 1V @ 30A                                                                                     | 1V @ 300A     | 3V @ 5A                                                                                      | 3V @ 50A      | 1V @ 60A                                                                                     | 1V @ 600A     |
| Constant Current mode    |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0~30A                                                                                        | 0~300A        | 0~5A                                                                                         | 0~50A         | 0~60A                                                                                        | 0~600A        |
| Resolution               | 7.7mA                                                                                        | 77mA          | 1.4mA                                                                                        | 14mA          | 16mA                                                                                         | 160mA         |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                | 0.2%+0.1%F.S. | 0.1%+0.1%F.S.                                                                                | 0.2%+0.1%F.S. | 0.1%+0.1%F.S.                                                                                | 0.2%+0.1%F.S. |
| Constant Resistance Mode |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0.005~20 Ω                                                                                   | 0.25~1000 Ω   | 0.25~1000 Ω                                                                                  | 10~40000 Ω    | 0.0025~10 Ω                                                                                  | 0.125~500 Ω   |
| Resolution*3             | 52mS                                                                                         | 1.04mS        | 1.2mS                                                                                        | 28.8μS        | 104mS                                                                                        | 2.1mS         |
| Accuracy*4               | 0.104S+0.35%                                                                                 | 0.9S+0.1%     | 0.0046S+0.35%                                                                                | 0.04S+0.1%    | 0.208S+0.35%*5                                                                               | 1.2S+0.1%     |
| Accuracy*6 (Vin>7V)      | 0.104S+0.35%                                                                                 | 0.0021S+0.35% | 0.0046S+0.35%                                                                                | 114μS+0.35%   | 0.208S+0.35%                                                                                 | 0.0042S+0.35% |
| Constant Voltage mode    |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0~16V                                                                                        | 0~80V         | 0~150V                                                                                       | 0~600V        | 0~16V                                                                                        | 0~80V         |
| Resolution               | 4mV                                                                                          | 20mV          | 40mV                                                                                         | 162mV         | 4mV                                                                                          | 20mV          |
| Accuracy                 | 0.05%+0.1%F.S.                                                                               |               | 0.05%+0.1%F.S.                                                                               |               | 0.05%+0.1%F.S.                                                                               |               |
| Constant Power mode      |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0.6~260W                                                                                     | 6~2600W       | 0.625~260W                                                                                   | 6.25~2600W    | 1.2~520W                                                                                     | 12~5200W      |
| Resolution               | 7.5mW                                                                                        | 75mW          | 3.125mW                                                                                      | 31.25mW       | 22.5mW                                                                                       | 225mW         |
| Accuracy                 | 0.5%+0.5%F.S.                                                                                |               | 0.5%+0.5%F.S.                                                                                |               | 0.5%+0.5%F.S.                                                                                |               |
| Dynamic mode             |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Timing                   |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| T1&T2                    | 0.025~10ms                                                                                   | 1ms~30s       | 0.025~10ms                                                                                   | 1ms~30s       | 0.025~10ms                                                                                   | 1ms~30s       |
| Resolution               | 1μs                                                                                          | 1ms           | 1μs                                                                                          | 1ms           | 1μs                                                                                          | 1ms           |
| Accuracy                 | 1μs+100ppm                                                                                   | 1ms+100ppm    | 1μs+100ppm                                                                                   | 1ms+100ppm    | 1μs+100ppm                                                                                   | 1ms+100ppm    |
| Slew rate                | 5mA~1.25A/μs                                                                                 | 50mA~12.5A/μs | 0.8mA~0.2A/μs                                                                                | 8mA~2A/μs     | 10mA~2.5A/μs                                                                                 | 100mA~25A/μs  |
| Resolution               | 5mA/μs                                                                                       | 50mA/μs       | 0.8mA/μs                                                                                     | 8mA/μs        | 10mA/μs                                                                                      | 100mA/μs      |
| Accuracy                 | 10% ± 20μs                                                                                   |               | 10% ± 20μs                                                                                   |               | 10% ± 20μs                                                                                   |               |
| Min. Rise Time           | 24μs (typical)                                                                               |               | 24μs (typical)                                                                               |               | 24μs (typical)                                                                               |               |
| Current                  |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0~30A                                                                                        | 0~300A        | 0~5A                                                                                         | 0~50A         | 0~60A                                                                                        | 0~600A        |
| Resolution               | 7.7mA                                                                                        | 77mA          | 1.4mA                                                                                        | 14mA          | 16mA                                                                                         | 160mA         |
| Accuracy                 | 0.4%F.S.                                                                                     |               | 0.4%F.S.                                                                                     |               | 0.4%F.S.                                                                                     |               |
| Measurement              |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Voltage Read Back        |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0~16V                                                                                        | 0~80V         | 0~150V                                                                                       | 0~600V        | 0~16V                                                                                        | 0~80V         |
| Resolution               | 0.6mV                                                                                        | 2.6mV         | 5.1mV                                                                                        | 21mV          | 0.6mV                                                                                        | 2.6mV         |
| Accuracy                 | 0.05%+0.05%F.S.                                                                              |               | 0.05%+0.05%F.S.                                                                              |               | 0.05%+0.05%F.S.                                                                              |               |
| Current Read Back        |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0~30A                                                                                        | 0~300A        | 0~5A                                                                                         | 0~50A         | 0~60A                                                                                        | 0~600A        |
| Resolution               | 1mA                                                                                          | 10mA          | 0.18mA                                                                                       | 1.8mA         | 2mA                                                                                          | 20mA          |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                |               | 0.1%+0.1%F.S.                                                                                |               | 0.1%+0.1%F.S.                                                                                |               |
| Power Read Back          |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Range                    | 0~260W                                                                                       | 0~2600W       | 0~260W                                                                                       | 0~2600W       | 0~520W                                                                                       | 0~5200W       |
| Accuracy*7               | 0.3%+0.3%F.S.                                                                                |               | 0.3%+0.3%F.S.                                                                                |               | 0.3%+0.3%F.S.                                                                                |               |
| General                  |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| Short Circuit            |                                                                                              |               |                                                                                              |               |                                                                                              |               |
| current                  | 30A                                                                                          | 300A          | 5A                                                                                           | 50A           | 60A                                                                                          | 600A          |
| Input Rating             | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               |
| Dimension (H x W x D)    | 177 x 440 x 589 mm /<br>6.9 x 17.3 x 23.2 inch                                               |               | 177 x 440 x 589 mm /<br>6.9 x 17.3 x 23.2 inch                                               |               | 353 x 440 x 589 mm /<br>6.9 x 17.3 x 23.2 inch                                               |               |
| Weight                   | 30 kg / 66.13 lbs                                                                            |               | 30 kg / 66.13 lbs                                                                            |               | 62 kg / 136.68 lbs                                                                           |               |
| Safety & EMC             | CE                                                                                           |               | CE                                                                                           |               | CE                                                                                           |               |

## SPECIFICATIONS-2

| Model                    | 63204                                                                                        |                | 63205                                                                                        |               | 63206                                                                                        |               |
|--------------------------|----------------------------------------------------------------------------------------------|----------------|----------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|---------------|
| Power*1                  | 520W                                                                                         | 5200W          | 650W                                                                                         | 6500W         | 1040W                                                                                        | 10400W        |
| Current                  | 0~10A                                                                                        | 0~100A         | 0~18A                                                                                        | 0~180A        | 0~60A                                                                                        | 0~600A        |
| Voltage*2                | 0~600V                                                                                       |                | 0~80V                                                                                        |               | 0~80V                                                                                        |               |
| Min. Operating voltage   | 1.5V @ 5A                                                                                    | 1.5V @ 50A     | 0.5V @ 9A                                                                                    | 0.5V @ 90A    | 0.5V @ 30A                                                                                   | 0.5V @ 300A   |
|                          | 3V @ 10A                                                                                     | 3V @ 100A      | 1V @ 18A                                                                                     | 1V @ 180A     | 1V @ 60A                                                                                     | 1V @ 600A     |
| Constant Current mode    |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0~10A                                                                                        | 0~100A         | 0~18A                                                                                        | 0~180A        | 0~60A                                                                                        | 0~600A        |
| Resolution               | 2.8mA                                                                                        | 28mA           | 5.2mA                                                                                        | 52mA          | 21mA                                                                                         | 170mA         |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                | 0.2%+0.1%F.S.  | 0.1%+0.2%F.S.                                                                                | 0.1%+0.2%F.S. | 0.1%+0.2%F.S.                                                                                | 0.1%+0.2%F.S. |
| Constant Resistance Mode |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0.125~500Ω                                                                                   | 5~20000Ω       | 0.008~32Ω                                                                                    | 0.4~1600Ω     | 0.0025~10Ω                                                                                   | 0.125~500Ω    |
| Resolution*3             | 2.3mS                                                                                        | 57.56μS        | 35mS                                                                                         | 0.7mS         | 112.5mS                                                                                      | 2.25mS        |
| Accuracy*4               | 0.0046S+0.35%                                                                                | 0.08S+0.1%     | 0.07S+0.35%                                                                                  | 0.75S+0.1%    | 0.225S+0.35% *5                                                                              | 1.2S+0.1%     |
| Accuracy*6 (Vin>7V)      | 0.0046S+0.35%                                                                                | 115.51μS+0.35% | 0.07S+0.35%                                                                                  | 0.0014S+0.35% | 0.225S+0.35%                                                                                 | 0.0045S+0.35% |
| Constant Voltage mode    |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0~150V                                                                                       | 0~600V         | 0~16V                                                                                        | 0~80V         | 0~16V                                                                                        | 0~80V         |
| Resolution               | 40mV                                                                                         | 162mV          | 4mV                                                                                          | 20mV          | 4mV                                                                                          | 20mV          |
| Accuracy                 | 0.05%+0.1%F.S.                                                                               |                | 0.05%+0.1%F.S.                                                                               |               | 0.05%+0.1%F.S.                                                                               |               |
| Constant Power mode      |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 1.25~520W                                                                                    | 12.5~5200W     | 0.36~650W                                                                                    | 3.6~6500W     | 1.2~1040W                                                                                    | 12~10400W     |
| Resolution               | 6.25mW                                                                                       | 62.5mW         | 4.6mW                                                                                        | 46mW          | 22.5mW                                                                                       | 225mW         |
| Accuracy                 | 0.5%+0.5%F.S.                                                                                |                | 0.5%+0.5%F.S.                                                                                |               | 0.5%+0.5%F.S.                                                                                |               |
| Dynamic mode             |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Timing                   |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| T1&T2                    | 0.025~10ms                                                                                   | 1ms~30s        | 0.025~10ms                                                                                   | 1ms~30s       | 0.025~10ms                                                                                   | 1ms~30s       |
| Resolution               | 1μs                                                                                          | 1ms            | 1μs                                                                                          | 1ms           | 1μs                                                                                          | 1ms           |
| Accuracy                 | 1μs+100ppm                                                                                   | 1ms+100ppm     | 1μs+100ppm                                                                                   | 1ms+100ppm    | 1μs+100ppm                                                                                   | 1ms+100ppm    |
| Slew rate                | 1.6mA~0.4A/μs                                                                                | 16mA~4A/μs     | 3mA~0.75A/μs                                                                                 | 30mA~7.5A/μs  | 10mA~3A/μs                                                                                   | 100mA~25A/μs  |
| Resolution               | 1.6mA/μs                                                                                     | 16mA/μs        | 3mA/μs                                                                                       | 30mA/μs       | 12mA/μs                                                                                      | 100mA/μs      |
| Accuracy                 | 10% ± 20μs                                                                                   |                | 10% ± 20μs                                                                                   |               | 10% ± 20μs                                                                                   |               |
| Min. Rise Time           | 24μs (typical)                                                                               |                | 24μs (typical)                                                                               |               | 20μs (typical)                                                                               |               |
| Current                  |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0~10A                                                                                        | 0~100A         | 0~18A                                                                                        | 0~180A        | 0~60A                                                                                        | 0~600A        |
| Resolution               | 2.8mA                                                                                        | 28mA           | 5.2mA                                                                                        | 52mA          | 21mA                                                                                         | 170mA         |
| Accuracy                 | 0.4%F.S.                                                                                     |                | 0.4%F.S.                                                                                     |               | 0.4%F.S.                                                                                     |               |
| Measurement              |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Voltage Read Back        |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0~150V                                                                                       | 0~600V         | 0~16V                                                                                        | 0~80V         | 0~16V                                                                                        | 0~80V         |
| Resolution               | 5.1mV                                                                                        | 21mV           | 0.6mV                                                                                        | 2.6mV         | 0.6mV                                                                                        | 2.6mV         |
| Accuracy                 | 0.05%+0.05%F.S.                                                                              |                | 0.05%+0.05%F.S.                                                                              |               | 0.05%+0.05%F.S.                                                                              |               |
| Current Read Back        |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0~10A                                                                                        | 0~100A         | 0~18A                                                                                        | 0~180A        | 0~60A                                                                                        | 0~600A        |
| Resolution               | 0.35mA                                                                                       | 3.5mA          | 0.7mA                                                                                        | 7mA           | 2.6mA                                                                                        | 21mA          |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                |                | 0.1%+0.1%F.S.                                                                                |               | 0.1%+0.1%F.S.                                                                                |               |
| Power Read Back          |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Range                    | 0~520W                                                                                       | 0~5200W        | 0~650W                                                                                       | 0~6500W       | 0~1040W                                                                                      | 0~10400W      |
| Accuracy*7               | 0.3%+0.3%F.S.                                                                                |                | 0.3%+0.3%F.S.                                                                                |               | 0.3%+0.3%F.S.                                                                                |               |
| General                  |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| Short Circuit            |                                                                                              |                |                                                                                              |               |                                                                                              |               |
| current                  | 10A                                                                                          | 100A           | 18A                                                                                          | 180A          | 60A                                                                                          | 600A          |
| Input Rating             | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |                | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               |
| Dimension (H x W x D)    | 353 x 440 x 589 mm /<br>13.9 x 17.3 x 23.2 inch                                              |                | 310 x 440 x 589 mm /<br>12.2 x 17.3 x 23.2 inch                                              |               | 443.7 x 440 x 589 mm /<br>17.5 x 17.3 x 23.2 inch                                            |               |
| Weight                   | 62 kg / 136.68 lbs                                                                           |                | 62 kg / 136.68 lbs                                                                           |               | 90 kg / 198.41 lbs                                                                           |               |
| Safety & EMC             | CE                                                                                           |                | CE                                                                                           |               | CE                                                                                           |               |

## SPECIFICATIONS-3

| Model                    | 63207                                                                                        |               | 63208                                                                                        |               | 63209                                                                                        |                |
|--------------------------|----------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|----------------|
| Power *1                 | 1040W                                                                                        | 10400W        | 1560W                                                                                        | 15600W        | 1560W                                                                                        | 15600W         |
| Current                  | 0~30A                                                                                        | 0~300A        | 0~60A                                                                                        | 0~600A        | 0~100A                                                                                       | 0~1000A        |
| Voltage*2                | 0~80V                                                                                        |               | 0~80V                                                                                        |               | 0~80V                                                                                        |                |
| Min. Operating voltage   | 0.5V @ 15A                                                                                   | 0.5V @ 150A   | 0.5V @ 30A                                                                                   | 0.5V @ 300A   | 0.5V @ 50A                                                                                   | 0.5V @ 500A    |
|                          | 1V @ 30A                                                                                     | 1V @ 300A     | 1V @ 60A                                                                                     | 1V @ 600A     | 1V @ 100A                                                                                    | 1V @ 1000A     |
| Constant Current mode    |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0~30A                                                                                        | 0~300A        | 0~60A                                                                                        | 0~600A        | 0~100A                                                                                       | 0~1000A        |
| Resolution               | 10.3mA                                                                                       | 82mA          | 21mA                                                                                         | 163mA         | 34.2mA                                                                                       | 274mA          |
| Accuracy                 | 0.1%+0.2%F.S.                                                                                | 0.1%+0.2%F.S. | 0.1%+0.2%F.S.                                                                                | 0.1%+0.2%F.S. | 0.1%+0.2%F.S.                                                                                | 0.1%+0.2%F.S.  |
| Constant Resistance Mode |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0.005~20Ω                                                                                    | 0.25~1000Ω    | 0.0025~10Ω                                                                                   | 0.125~500Ω    | 0.0015~6Ω                                                                                    | 0.075~300Ω     |
| Resolution*3             | 55.7mS                                                                                       | 1.1mS         | 110mS                                                                                        | 2.22mS        | 186.5mS                                                                                      | 3.73mS         |
| Accuracy *4              | 0.111S+0.35%                                                                                 | 0.9S+0.1%     | 0.22S+0.35% *5                                                                               | 1.2S+0.1%     | 0.373S+0.35% *5                                                                              | 1.2S+0.1%      |
| Accuracy *6 (Vin>7V)     | 0.111S+0.35%                                                                                 | 0.0022S+0.35% | 0.22S+0.35%                                                                                  | 0.0044S+0.35% | 0.373S+0.35%                                                                                 | 0.0075S+0.35%  |
| Constant Voltage mode    |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0~16V                                                                                        | 0~80V         | 0~16V                                                                                        | 0~80V         | 0~16V                                                                                        | 0~80V          |
| Resolution               | 4mV                                                                                          | 20mV          | 4mV                                                                                          | 20mV          | 4mV                                                                                          | 20mV           |
| Accuracy                 | 0.05%+0.1%F.S.                                                                               |               | 0.05%+0.1%F.S.                                                                               |               | 0.05%+0.1%F.S.                                                                               |                |
| Constant Power mode      |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0.744~1040W                                                                                  | 6~10400W      | 1.2~1560W                                                                                    | 12~15600W     | 2.5~1560W                                                                                    | 20~15600W      |
| Resolution               | 9.3mW                                                                                        | 75mW          | 22.5mW                                                                                       | 225mW         | 31.255mW                                                                                     | 250mW          |
| Accuracy                 | 0.5%+0.5%F.S.                                                                                |               | 0.5%+0.5%F.S.                                                                                |               | 0.5%+0.5%F.S.                                                                                |                |
| Dynamic mode             |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Timing                   |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| T1&T2                    | 0.025~10ms                                                                                   | 1ms~30s       | 0.025~10ms                                                                                   | 1ms~30s       | 0.025~10ms                                                                                   | 1ms~30s        |
| Resolution               | 1μs                                                                                          | 1ms           | 1μs                                                                                          | 1ms           | 1μs                                                                                          | 1ms            |
| Accuracy                 | 1μs+100ppm                                                                                   | 1ms+100ppm    | 1μs+100ppm                                                                                   | 1ms+100ppm    | 1μs+100ppm                                                                                   | 1ms+100ppm     |
| Slew rate                | 6mA~1.5A/μs                                                                                  | 50mA~12.5A/μs | 12mA~3A/μs                                                                                   | 100mA~25A/μs  | 20mA~5A/μs                                                                                   | 166mA~41.6A/μs |
| Resolution               | 6mA/μs                                                                                       | 50mA/μs       | 12mA/μs                                                                                      | 100mA/μs      | 20mA/μs                                                                                      | 166mA/μs       |
| Accuracy                 | 10% ± 20μs                                                                                   |               | 10% ± 20μs                                                                                   |               | 10% ± 20μs                                                                                   |                |
| Min. Rise Time           | 20μs (typical)                                                                               |               | 20μs (typical)                                                                               |               | 20μs (typical)                                                                               |                |
| Current                  |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0~30A                                                                                        | 0~300A        | 0~60A                                                                                        | 0~600A        | 0~100A                                                                                       | 0~1000A        |
| Resolution               | 10.3mA                                                                                       | 82mA          | 21mA                                                                                         | 163mA         | 34.2mA                                                                                       | 274mA          |
| Accuracy                 | 0.4%F.S.                                                                                     |               | 0.4%F.S.                                                                                     |               | 0.4%F.S.                                                                                     |                |
| Measurement              |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Voltage Read Back        |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0~16V                                                                                        | 0~80V         | 0~16V                                                                                        | 0~80V         | 0~16V                                                                                        | 0~80V          |
| Resolution               | 0.6mV                                                                                        | 2.6mV         | 0.6mV                                                                                        | 2.6mV         | 0.6mV                                                                                        | 2.6mV          |
| Accuracy                 | 0.05%+0.05%F.S.                                                                              |               | 0.05%+0.05%F.S.                                                                              |               | 0.05%+0.05%F.S.                                                                              |                |
| Current Read Back        |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0~30A                                                                                        | 0~300A        | 0~60A                                                                                        | 0~600A        | 0~100A                                                                                       | 0~1000A        |
| Resolution               | 1.3mA                                                                                        | 11mA          | 2.7mA                                                                                        | 21mA          | 4.5mA                                                                                        | 36mA           |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                |               | 0.1%+0.1%F.S.                                                                                |               | 0.1%+0.1%F.S.                                                                                |                |
| Power Read Back          |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Range                    | 0~1040W                                                                                      | 0~10400W      | 0~1560W                                                                                      | 0~15600W      | 0~1560W                                                                                      | 0~15600W       |
| Accuracy*7               | 0.3%+0.3%F.S.                                                                                |               | 0.3%+0.3%F.S.                                                                                |               | 0.3%+0.3%F.S.                                                                                |                |
| General                  |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Short Circuit            |                                                                                              |               |                                                                                              |               |                                                                                              |                |
| Current                  | 30A                                                                                          | 300A          | 60A                                                                                          | 600A          | 100A                                                                                         | 1000A          |
| Input Rating             | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |                |
| Dimension (H x W x D)    | 443.7 x 440 x 589 mm /<br>17.5 x 17.3 x 23.2 inch                                            |               | 762.8 x 546 x 700 mm /<br>30 x 21.5 x 27.6 inch                                              |               | 762.8x546x700mm/<br>30x21.5x27.6inch(cabinet)                                                |                |
| Weight                   | 90 kg / 198.24 lbs                                                                           |               | 170 kg / 374.45 lbs                                                                          |               | 170 kg / 374.45 lbs                                                                          |                |
| Safety & EMC             | CE                                                                                           |               | CE                                                                                           |               | CE                                                                                           |                |

## SPECIFICATIONS-4

| Model                    | 63210                                                                                        |               | 63211                                                                                        |                  |
|--------------------------|----------------------------------------------------------------------------------------------|---------------|----------------------------------------------------------------------------------------------|------------------|
| Power *1                 | 1450W                                                                                        | 14500W        | 15600W                                                                                       | 15600W           |
| Current                  | 0~15A                                                                                        | 0~150A        | 0~30A                                                                                        | 0~150A           |
| Voltage*2                | 0~600V                                                                                       |               | 10~1000V                                                                                     |                  |
| Min. Operating voltage   | 1.5V @ 7.5A                                                                                  | 1.5V @ 75A    | 5V @ 15A                                                                                     | 5V @ 75A         |
|                          | 3V @ 15A                                                                                     | 3V @ 150A     | 10V @ 30A                                                                                    | 10V @ 150A       |
| Constant Current mode    |                                                                                              |               |                                                                                              |                  |
| Range                    | 0~15A                                                                                        | 0~150A        | 0~30A                                                                                        | 0~150A           |
| Resolution               | 4.9mA                                                                                        | 39mA          | 7.5mA                                                                                        | 37.5mA           |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                | 0.2%+0.1%F.S. | 0.1%+0.1%F.S.                                                                                | 0.2%+0.1%F.S.    |
| Constant Resistance Mode |                                                                                              |               |                                                                                              |                  |
| Range                    | 0.1~400Ω                                                                                     | 5~20000Ω      | 0.2~200Ω                                                                                     | 8~8000Ω          |
| Resolution*3             | 3.21mS                                                                                       | 80.1μS        | 14.3mS                                                                                       | 360μS            |
| Accuracy *4              | 0.0128S+0.35%                                                                                | 0.092S+0.1%   | 28.7mS+0.5%                                                                                  | 715μS+0.5%       |
| Accuracy *6 (Vin>7V)     | 0.0128S+0.35%                                                                                | 317.7μS+0.35% | --                                                                                           | --               |
| Constant Voltage mode    |                                                                                              |               |                                                                                              |                  |
| Range                    | 0~150V                                                                                       | 0~600V        | 0~250V                                                                                       | 0~1000V          |
| Resolution               | 40mV                                                                                         | 162mV         | 62.5mV                                                                                       | 250mV            |
| Accuracy                 | 0.05%+0.1%F.S.                                                                               |               | 0.05%+0.1%F.S.                                                                               |                  |
| Constant Power mode      |                                                                                              |               |                                                                                              |                  |
| Range                    | 5~1450W                                                                                      | 50~14500W     | 2.5~1560W                                                                                    | 20~15600W        |
| Resolution               | 25mW                                                                                         | 250mW         | 390mW                                                                                        | 3.9W             |
| Accuracy                 | 0.5%+0.5%F.S.                                                                                |               | 0.5%+0.5%F.S.                                                                                |                  |
| Dynamic mode             |                                                                                              |               |                                                                                              |                  |
| Timing                   |                                                                                              |               |                                                                                              |                  |
| T1&T2                    | 0.025~10ms                                                                                   | 1ms~30s       | 0.025~10ms                                                                                   | 1ms~30s          |
| Resolution               | 1μs                                                                                          | 1ms           | 1μs                                                                                          | 1ms              |
| Accuracy                 | 1μs+100ppm                                                                                   | 1ms+100ppm    | 1μs+100ppm                                                                                   | 1ms+100ppm       |
| Slew rate                | 3mA~0.75A/μs                                                                                 | 25mA~6A/μs    | 5mA~1.25A/μs *8                                                                              | 25mA~6.25A/μs *8 |
| Resolution               | 3mA/μs                                                                                       | 25mA/μs       | 5mA/μs                                                                                       | 25mA/μs          |
| Accuracy                 | 10% ± 20μs                                                                                   |               | 10% ± 20μs                                                                                   |                  |
| Min. Rise Time           | 150 μs (typical)                                                                             |               | 24 μs (typical)                                                                              |                  |
| Current                  |                                                                                              |               |                                                                                              |                  |
| Range                    | 0~15A                                                                                        | 0~150A        | 0~30A                                                                                        | 0~150A           |
| Resolution               | 4.9mA                                                                                        | 39mA          | 0.6mA                                                                                        | 3mA              |
| Accuracy                 | 0.4%F.S.                                                                                     |               | 0.4%F.S.                                                                                     |                  |
| Measurement              |                                                                                              |               |                                                                                              |                  |
| Voltage Read Back        |                                                                                              |               |                                                                                              |                  |
| Range                    | 0~150V                                                                                       | 0~600V        | 0~250V                                                                                       | 0~1000V          |
| Resolution               | 5.1mV                                                                                        | 21mV          | 5mV                                                                                          | 20mV             |
| Accuracy                 | 0.05%+0.05%F.S.                                                                              |               | 0.05%+0.05%F.S.                                                                              |                  |
| Current Read Back        |                                                                                              |               |                                                                                              |                  |
| Range                    | 0~15A                                                                                        | 0~150A        | 0~30A                                                                                        | 0~150A           |
| Resolution               | 0.64mA                                                                                       | 5.1mA         | 0.6mA                                                                                        | 3mA              |
| Accuracy                 | 0.1%+0.1%F.S.                                                                                |               | 0.1%+0.1%F.S.                                                                                |                  |
| Power Read Back          |                                                                                              |               |                                                                                              |                  |
| Range                    | 0~1450W                                                                                      | 0~14500W      | 0~1560W                                                                                      | 0~15600W         |
| Accuracy*7               | 0.3%+0.3%F.S.                                                                                |               | 0.3%+0.3%F.S.                                                                                |                  |
| General                  |                                                                                              |               |                                                                                              |                  |
| Short Circuit            |                                                                                              |               |                                                                                              |                  |
| Current                  | 15A                                                                                          | 150A          | 30A                                                                                          | 150A             |
| Input Rating             | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |               | 1Ø 100/200Vac ± 10% V <sub>LN</sub> 47~63Hz ;<br>1Ø 115/230Vac ± 10% V <sub>LN</sub> 47~63Hz |                  |
| Dimension (H x W x D)    | 762.8x546x700mm/<br>30x21.5x27.6inch(cabinet)                                                |               | 762.8x546x700mm/<br>30x21.5x27.6inch(cabinet)                                                |                  |
| Weight                   | 170 kg / 374.45 lbs                                                                          |               | 170 kg / 374.45 lbs                                                                          |                  |
| Safety & EMC             | CE                                                                                           |               | CE                                                                                           |                  |

**NOTE\*1** : The power rating specifications at ambient temperature=25°C and see the diagram below for power derating.

**NOTE\*2** : If the operating voltage exceeds the rated voltage for 1.1 times, it would cause permanent damage to the device.

**NOTE\*3** : S (siemens) is the SI unit of conductance, equal to one reciprocal ohm.

**NOTE\*4** : The Vin must be greater than min. operating voltage of each model.

**NOTE\*5** : Setting error will be 1% for R<0.005Ω at CRL range.

**NOTE\*6** : The Vin must be greater than 7V of each model.

**NOTE\*7** : Power F.S. = Vrange x Irange F.S.

**NOTE\*8** : The specification is valid only for loading current >10A.

## SELECTION GUIDE

| Model \ Power | 2600W | 5200W | 6500W | 10400W      | 14500W | 15600W      |
|---------------|-------|-------|-------|-------------|--------|-------------|
| Voltage       |       |       |       |             |        |             |
| 80V           | 63201 | 63203 | 63205 | 63206/63207 | --     | 63208/63209 |
| 600V          | 63202 | 63204 | --    | --          | 63210  | --          |
| 1000V         | --    | --    | --    | --          | --     | 63211       |

## NUMBER OF PARALLEL LOAD UNITS AND RATING

| Model \ Rating Units | 63201        | 63202       | 63203        | 63204       | 63205       | 63206        | 63207        | 63208        | 63209        | 63210       | 63211       |
|----------------------|--------------|-------------|--------------|-------------|-------------|--------------|--------------|--------------|--------------|-------------|-------------|
| 2                    | 600A/5.2kW   | 100A/5.2kW  | 1200A/10.4kW | 200A/10.4kW | 360A/13kW   | 1200A/20.8kW | 600A/20.8kW  | 1200A/31.2kW | 2000A/31.2kW | 300A/29kW   | 300A/31.2kW |
| 3                    | 900A/7.8kW   | 150A/7.8kW  | 1800A/15.6kW | 300A/15.6kW | 540A/19.5kW | 1800A/31.2kW | 900A/31.2kW  | 1800A/46.8kW | 3000A/46.8kW | 450A/43.5kW | 450A/46.8kW |
| 4                    | 1200A/10.4kW | 200A/10.4kW | 2400A/20.8kW | 400A/20.8kW | 720A/26kW   | 2400A/41.6kW | 1200A/41.6kW | 2400A/62.4kW | 4000A/62.4kW | 600A/58kW   | 600A/62.4kW |
| 5                    | 1500A/13kW   | 250A/13kW   | 3000A/26kW   | 500A/26kW   | 900A/32.5kW | 3000A/52kW   | 1800A/52kW   | 3000A/78kW   | 5000A/78kW   | 750A/72.5kW | 750A/78kW   |
| 6                    | 1800A/15.6kW | 300A/15.6kW | 3600A/31.2kW | 600A/31.2kW | 1080A/39kW  | 3600A/62.4kW | 2400A/62.4kW | 3600A/93.6kW | 6000A/93.6kW | 900A/87kW   | 900A/93.6kW |

## ORDERING INFORMATION

**63201** : DC Electronic Load 80V/300A/2.6kW  
**63202** : DC Electronic Load 600V/50A/2.6kW  
**63203** : DC Electronic Load 80V/600A/5.2kW  
**63204** : DC Electronic Load 600V/100A/5.2kW  
**63205** : DC Electronic Load 80V/180A/6.5kW  
**63206** : DC Electronic Load 80V/600A/10.4kW  
**63207** : DC Electronic Load 80V/300A/10.4kW  
**63208** : DC Electronic Load 80V/600A/15.6kW  
**63209** : DC Electronic Load 80V/1000A/15.6kW  
**63210** : DC Electronic Load 600V/150A/14.5kW  
**63211** : DC Electronic Load 1000V/150A/15.6kW  
**A632001** : Remote Controller  
**A632002** : Load Cable 38mm/242A/200cmx2  
**A632003** : Load Cable 80mm/390A/200cmx2  
**A632004** : Sync. Link Box for 6330A & 63200 series  
**A632005** : Softpanel for 63200 series  
**A632006** : NI USB-6211 Bus-Powered Multifunction DAQ




A632001



A632004



A632006

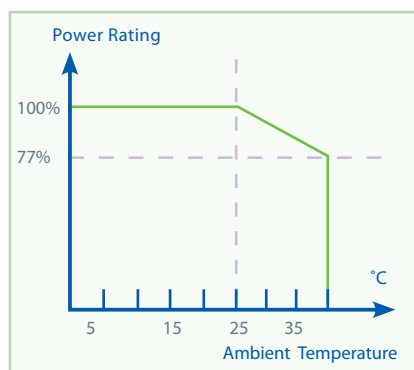

Developed and Manufactured by :

**CHROMA ATE INC.**  
 致茂電子股份有限公司  
**HEADQUARTERS**  
 66 Hwaya 1st Rd., Kueishan  
 Hwaya Technology Park,  
 Taoyuan County 33383,  
 Taiwan  
 Tel: +886-3-327-9999  
 Fax: +886-3-327-8898  
 http://www.chromaate.com  
 E-mail: info@chromaate.com

**CHINA**  
**CHROMA ELECTRONICS**  
**(SHENZHEN) CO., LTD.**  
 8F, No.4, Nanyou Tian An  
 Industrial Estate, Shenzhen,  
 China PC: 518052  
 Tel: +86-755-2664-4598  
 Fax: +86-755-2641-9620

**JAPAN**  
**CHROMA JAPAN CORP.**  
 472 Nippa-cho, Kouhoku-ku,  
 Yokohama-shi, Kanagawa,  
 223-0057 Japan  
 Tel: +81-45-542-1118  
 Fax: +81-45-542-1080  
 http://www.chroma.co.jp  
 E-mail: info@chromaate.com

**U.S.A.**  
**CHROMA SYSTEMS**  
**SOLUTIONS, INC.**  
 19772 Pauling,  
 Foothill Ranch, CA 92610  
 Tel: +1-949-600-6400  
 Fax: +1-949-600-6401  
 http://www.chromausa.com  
 E-mail: sales@chromausa.com

**EUROPE**  
**CHROMA ATE EUROPE B.V.**  
 Morsestraat 32, 6716 AH Ede,  
 The Netherlands  
 Tel: +31-318-648282  
 Fax: +31-318-648288  
 http://www.chroma.eu.com  
 E-mail: sales@chromaeu.com

Worldwide Distribution and Service Network

63200-E-201305-2000

**DISTRAME S.A.** - Parc du Grand Troyes - Quartier Europe Centrale - 40, rue de Vienne - 10300 SAINTE-SAVINE  
 Tél. : +33 (0)3 25 71 25 83 - Fax : +33 (0)3 25 71 28 98 - E-mail : infos@distrame.fr - Site internet : www.distrame.fr