


E3W Clip-on Ultrasonic Thermal Energy / BTU Flow Meter



Product Overview

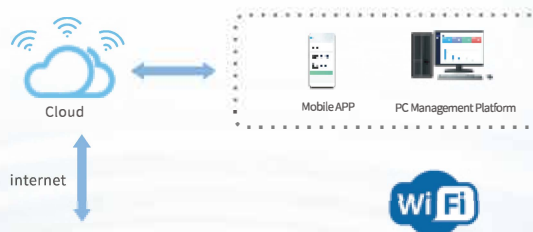

The quick measure E3W adopts the ultrasonic transit time measurement principle, combined with patented flow algorithm technology, to provide accurate measurement of fluid flow in pipes. The product features an all-in-one, clip-on structure design that is simple and convenient to install. The installation process requires no contact with fluid media and does not require system shutdown. Only four simple steps are needed for setup.

The instrument adopts WIFI communication, implement cloud data storage, users can access cloud data anytime and anywhere through mobile and PC terminals, manage, analyze and query measurement data information.

Product Features and Functions

Features


- Easy installation, no pipe rework or damage
- No adjustment, clip on to measure
- LCD colorful display screen
- 360° rotation adjustable display screen

Functions

- WIFI communication
- Available on the MeterTube app and platform

Application and Industry

HVAC, heating, energy-saving monitoring, heat balance regulation, heating regulation, AHU room, thermal energy transformation...




Application Topology

E3W adopts WiFi communication to realize cloud data storage. Users can access cloud data through mobile terminals and PC terminals anytime and anywhere to manage, analyze and query measurement data information.

Notice: Add a Device by Scanning Device QR Code. The next MeterTube app comes with reminder of Cloud Platform Subscription Renewal.







Meter Wiring

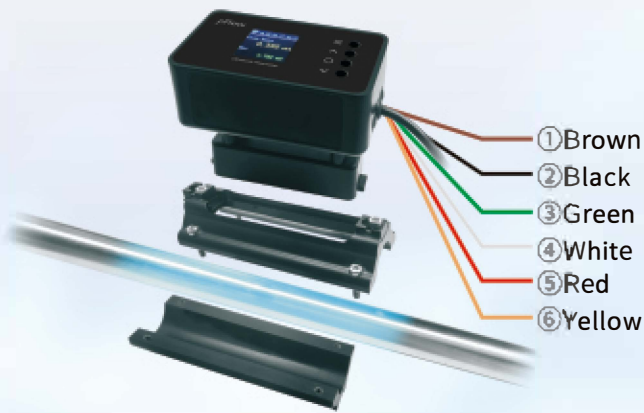

Function	Identification	Color
Power Supply (10~36VDC) + Brown	+	Brown
	-	Black
RS485	A	Green
	B	White
None	/	Red
	/	Yellow

Installation Method:

The product is all-in-one and clip-on structure design, which is simple and convenient to install. Only four steps are needed all along. The installation process requires no contact with fluid media and no need to shut down.



Product Model

Model Selection

Model: E3W; Format: A-B

Model	Description of Transmitter	
E3W	Model Name: E3W Clip-on	WiFi: Available
	Ultrasonic Thermal Energy / BTU Flow Meter	Pipe Material: Carbon steel, Stainless steel, Copper, PVC
	Velocity range: 0.03~5m/s	Communication: RS485 (standard)
	Accuracy: $\pm 2\%$	Support FUJI protocol and MODBUS protocol
	Measuring medium: Water	Temp. of Transmitter Installation Environment: -10°C~50°C
	Keyboard: 4 keys	Temp. of Measured Medium: 0°C~60°C
	Display: 1.44" LCD colorful screen, Resolution: 128*128	Transmitter: All-In-One
	Protection Level: IP54	Transducer: Clip-on

Specifications

A	Pipe Range
Pipe OD Range	Unit: mm, Pipe Material (PVC, Carbon Steel, Stainless Steel)
	DN20(21~29), DN25(28~36), DN32(35~43), DN40(46~54), DN50(59~67), DN65(72~80), DN80(83~91)
	Unit: mm, Pipe Material (Copper)
	DN25(21~29), DN32(28~36), DN40(35~43), DN50(46~54), DN65(59~67), DN80(72~80)
B	Pipe Material (Optional)
1	Carbon Steel
2	Stainless Steel
3	Copper
4	PVC

Selection Example: Model: E3W; Specification: DN20-1

For example: (Model: E3W Clip-on Ultrasonic Thermal Energy / BTU Flow Meter; DN20, Carbon Steel)

Product Series

Accuracy Rate 0.5

D118i Insertion
P118i(HD) Portable
D118 Insertion/Clamp on
D348D Plus multipath
...

Accuracy Rate 1.0

D116 Insertion/Clamp on
P116 Clamp on
...

For HVAC

F5 wall mounted meter
F8 wall mounted meter
E5 wall mounted Clip-on Ultrasonic
Thermal Energy / BTU Flow Meter
E8 wall mounted Clip-on Ultrasonic
Thermal Energy / BTU Flow Meter
...

Clip-on Series

F2 Clip-on flow meter
E3CL/E3RO Clip-on Thermal Energy / BTU Flow
Meter
E3R Clip-on Thermal Energy / BTU Flow Meter
E3EClip-on Thermal Energy / BTU Flow Meter
E3W Clip-on Thermal Energy / BTU Flow Meter
...

DISTRAME

Parc du Grand Troyes - 40 rue de Vienne - 10300 SAINTE-SAVINE
Tél. : 03 25 71 25 83 - infos@distrame.fr - www.distrame.fr

GT-SC047-A10530

The information provided is for reference only. Content is subject to change without prior notice.