


# Keysight E5063A

## ENA Vector Network Analyzer

100 kHz to 500 M/1.5 G/3 G/4.5 G/6.5 G/8.5 G/14 G/18 GHz

### Configuration Guide

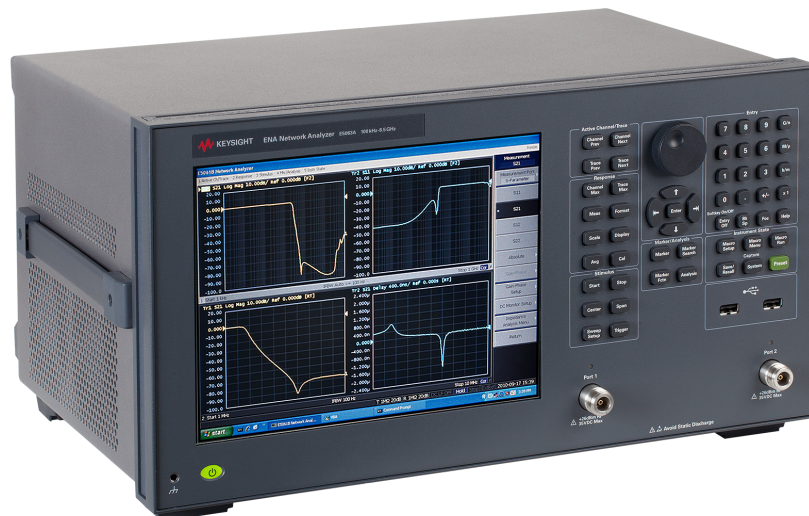

## Ordering Guide

The following steps will guide you through configuring your Keysight Technologies' E5063A.

### Standard furnished item

Description	Additional information
Installation guide	Contains the information necessary to start up with the E5063A.
CD ROM IO libraries	
Power Cable	
Calibration of Certification	

### Step 1. Choose frequency option (must choose one of the eight frequency options.)

Description	Option no.
Network Analyzer 100 kHz to 500 MHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-205
Network Analyzer 100 kHz to 1.5 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-215
Network Analyzer 100 kHz to 3 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-235
Network Analyzer 100 kHz to 4.5 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-245
Network Analyzer 100 kHz to 6.5 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-265
Network Analyzer 100 kHz to 8.5 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-285
Network Analyzer 100 kHz to 14 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-2D5
Network Analyzer 100 kHz to 18 GHz, S-parameter test set, 50 $\Omega$ system impedance	E5063A-2H5

### Step 2. Choose software option (If not required, go to step 4.)

Description	Option no.	Requires	Not compatible	Additional information
Time Domain/Test wizard	E5063A-011	None	None <sup>1</sup>	This option is required for time domain analysis or PCB measurements
Time Domain	E5063A-010	None	E5063A-011	Adds time domain transform and gating capabilities
Wireless power transfer analysis	E5063A-006	None	None	This option is required for wireless power transfer efficiency test of wireless power transfer modules

1. E5063A-011 is a superset of E5063A-010. E5063A-011 includes the capability of E5063A-010.

### Step 3. Choose hardware option

Description	Option no.	Requires	Not compatible	Additional information
Add GPIB interface	E5063A-721	None	E5063A-722	Must choose either Option 721 or 722
Without GPIB interface	E5063A-722	None	E5063A-721	Must choose either Option 721 or 722
Add handler I/O interface	E5063A-731	None	E5063A-732	Must choose either Option 731 or 732
Without handler I/O interface	E5063A-732	None	E5063A-731	Must choose either Option 731 or 732

### Step 4. Choose storage drive option (mandatory option)

Description	Option no.	Requires	Not compatible	Additional information
Standard storage drive	E5063A-019	None	None	Option 019 is the only storage drive option for the E5063A. Must choose this option

### Step 5. Add accessory option (If not required, go to step 6.)

Description	Option no.	Requires	Not compatible	Additional information
Keyboard	E5063A-810	None	None	USB Keyboard for simplifying word inputs.
Mouse	E5063A-820	None	None	USB Mouse for simplifying measurement operation.
Rackmount Kit	E5063A-1CM	None	None	Not installable simultaneously with E5063A -1CP.
Front Handle Kit	E5063A-1CN	None	None	Not installable simultaneously with E5063A -1CP.
Handle/Rack Mount Kit	E5063A-1CP	None	None	Not installable simultaneously with E5063A -1CM or 1CN.

### Step 6. Add calibration certificate (If not required, go to step 7.)

Description	Option no.	Additional information
ISO 17025 Compliant Calibration	E5063A-1A7	ISO 17025 compliant calibration
ANSI Z540 compliant calibration	E5063A-A6J	ANSI Z540 compliant calibration

## E5063A Upgrade Kits

Upgrade kits are available to add any E5063A software or hardware features after initial purchase. To upgrade your existing E5063A, order the corresponding item number. For further information, visit: [www.keysight.com/find/ena\\_support](http://www.keysight.com/find/ena_support)

## Frequency Upgrades

Upgrade kit option no.	Description	From	To	Customer installable
E5063AU-210	Upgrade from 500 MHz to 1.5 GHz	E5063A-205	E5063A-215	No
E5063AU-230	Upgrade from 500 MHz to 3 GHz	E5063A-205	E5063A-235	No
E5063AU-240	Upgrade from 500 MHz to 4.5 GHz	E5063A-205	E5063A-245	No
E5063AU-260	Upgrade from 500 MHz to 6.5 GHz	E5063A-205	E5063A-265	No
E5063AU-280	Upgrade from 500 MHz to 8.5 GHz	E5063A-205	E5063A-285	No
E5063AU-2D0	Upgrade from 500 MHz to 14 GHz	E5063A-205	E5063A-2D5	No
E5063AU-2H0	Upgrade from 500 MHz to 18 GHz	E5063A-205	E5063A-2H5	No
E5063AU-231	Upgrade from 1.5 GHz to 3 GHz	E5063A-215	E5063A-235	No
E5063AU-241	Upgrade from 1.5 GHz to 4.5 GHz	E5063A-215	E5063A-245	No
E5063AU-261	Upgrade from 1.5 GHz to 6.5 GHz	E5063A-215	E5063A-265	No
E5063AU-281	Upgrade from 1.5 GHz to 8.5 GHz	E5063A-215	E5063A-285	No
E5063AU-2D1	Upgrade from 1.5 GHz to 14 GHz	E5063A-215	E5063A-2D5	No
E5063AU-2H1	Upgrade from 1.5 GHz to 18 GHz	E5063A-215	E5063A-2H5	No
E5063AU-243	Upgrade from 3 GHz to 4.5 GHz	E5063A-235	E5063A-245	No
E5063AU-263	Upgrade from 3 GHz to 6.5 GHz	E5063A-235	E5063A-265	No
E5063AU-283	Upgrade from 3 GHz to 8.5 GHz	E5063A-235	E5063A-285	No
E5063AU-2D3	Upgrade from 3 GHz to 14 GHz	E5063A-235	E5063A-2D5	No
E5063AU-2H3	Upgrade from 3 GHz to 18 GHz	E5063A-235	E5063A-2H5	No
E5063AU-265	Upgrade from 4.5 GHz to 6.5 GHz	E5063A-245	E5063A-265	No
E5063AU-285	Upgrade from 4.5 GHz to 8.5 GHz	E5063A-245	E5063A-285	No
E5063AU-2D5	Upgrade from 4.5 GHz to 14 GHz	E5063A-245	E5063A-2D5	No
E5063AU-2H5	Upgrade from 4.5 GHz to 18 GHz	E5063A-245	E5063A-2H5	No
E5063AU-286	Upgrade from 6.5 GHz to 8.5 GHz	E5063A-265	E5063A-285	No
E5063AU-2D6	Upgrade from 6.5 GHz to 14 GHz	E5063A-265	E5063A-2D5	No
E5063AU-2H7	Upgrade from 6.5 GHz to 18 GHz	E5063A-265	E5063A-2H5	No
E5063AU-2D8	Upgrade from 8.5 GHz to 14 GHz	E5063A-285	E5063A-2D5	No
E5063AU-2H6	Upgrade from 8.5 GHz to 18 GHz	E5063A-285	E5063A-2H5	No
E5063AU-2HD	Upgrade from 14 GHz to 18 GHz	E5063A-2D5	E5063A-2H5	No

## Hardware Upgrades

Upgrade model no.	Description	Option no.	Customer installable	Requires (Instrument must already include the following)
E5063AU-721	Add GPIB interface	E5063A-721	No	None
E5063AU-731	Add handler I/O interface	E5063A-731	No	None

## Software Upgrades

Upgrade model no.	Description	Option no.	Customer installable	Requires (Instrument must already include the following)	Additional information
E5063AU-011	Time Domain/Test wizard	E5063A-011	Yes	None	This option is required for time domain analysis or PCB measurements
E5063AU-010	Time Domain	E5063A-010	Yes	None	Adds time domain transform and gating capabilities
E5063AU-006	Wireless power transfer analysis	E5063A-006	Yes	None	This option is required for wireless power transfer efficiency test of wireless power transfer modules

## OS Upgrades

Upgrade model no.	Description	Customer installable	Requires (instrument must already include the following)	Additional information
E5063AU-040	Upgrade digital H/W from Windows 7 to Windows 10 for COMe CPU	No	None	For units with older CPUs (serial-number prefixes of MY541/542, SG541/542 or lower), order this upgrade model.
E5063AU-041	Upgrade digital H/W form Windows 7 to Windows 10 for Flex-ATX CPU	No	None	For units with newer CPUs (serial-number prefixes of MY543/544, SG543/544 or higher), order this upgrade model.

## Test Accessories and Calibration Kits

A complete list of RF test accessories and calibration kits are available on our Web site:

[www.keysight.com/find/mta](http://www.keysight.com/find/mta)  
[www.keysight.com/find/ecal](http://www.keysight.com/find/ecal)

### Test accessories

Test accessories such as test port cable are necessary for a complete measurement system using the E5063A. Order test accessories in accordance with the desired measurement system.

Category	Product Number	Description
Cables	N6314A	50 $\Omega$ Type-N (m) to Type-N (m) cable, DC to 12.4 GHz, 61 cm (24 inches)
	N6315A	50 $\Omega$ Type-N (m) to Type-N (f) cable, DC to 12.4 GHz, 61 cm (24 inches)
	11500E	3.5 mm (m) to 3.5 mm (m) cable, 61 cm (24 inches)
	11500F	3.5 mm (m) to 3.5 mm (m) cable, 152 cm (60 inches)
	N4419AK20	Single, flexible: 3.5 mm (m) to 3.5 mm (f), 91.4 cm (26 inches)
	Z5623A-K20	Single, flexible: 3.5 mm (m) to 3.5 mm (m), 91.4 cm (36 inches)
Adapters	11853A	50 $\Omega$ Type-N accessory kit
	11878A	Type-N to 3.5 mm adapter kit

## Calibration kits

Calibration is an accuracy enhancement procedure that effectively reduces the system errors that cause uncertainty in network measurement. Calibration kit is necessary to perform the calibration.

- Mechanical calibration kits include standards, such as opens, shorts and loads, which are measured by the network analyzer. Choose a calibration kit for each connector type to be used.
- Electronic calibration (ECal) modules replace mechanical calibration standards with one solid-state calibration module that is controlled by the network analyzer via USB. ECal modules provide many different impedances to the test ports which enables a full two-port calibration to be performed quickly with a single connection. This technique reduces operator errors and connector wear and abrasion.

Category	Product Number	Description
Mechanical calibration kits	85032F	Standard mechanical calibration kit, DC to 9 GHz, Type-N
	85033E	Standard mechanical calibration kit, DC to 9 GHz, 3.5 mm
	85052D	Economy mechanical calibration kit, DC to 26.5 GHz, 3.5 mm
	85054D	Economy mechanical calibration kit, DC to 18 GHz, Type-N
Electronic calibration (ECal) modules	85092C	RF ECal module, 300 kHz to 9 GHz, Type-N, 2-port
	85093C	RF ECal module, 300 kHz to 9 GHz, 3.5 mm, 2-port
	N7550A <sup>1</sup>	Economy ECal module, DC to 4 GHz, Type-N or 3.5 mm, 2-port
	N7551A <sup>1</sup>	Economy ECal module, DC to 6.5 GHz, Type-N or 3.5 mm, 2-port
	N7552A <sup>1</sup>	Economy ECal module, DC to 9 GHz, Type-N or 3.5 mm, 2-port
	N7553A <sup>1</sup>	Economy ECal module, DC to 14 GHz, Type-N or 3.5 mm, 2-port
	N7554A <sup>1</sup>	Economy ECal module, DC to 18 GHz, Type-N or 3.5 mm, 2-port
	N4690D <sup>2</sup>	Microwave ECal module, DC/300 kHz to 18 GHz, Type-N, 2-port
	N4691D <sup>2</sup>	Microwave ECal module, DC/300 kHz to 26.5 GHz, 3.5 mm, 2-port
	N4696D <sup>2</sup>	Microwave ECal module, DC/300 kHz to 18 GHz, 7 mm, 2-port

1. The E5063A must have the firmware revision A.03.72 or above for the operation with the N755xA series ECal.

2. The E5063A must have the firmware revision A.05.04 or above for the operation with the N469xD series ECal.

## Literature Resources

Description	Publication number
<i>E5063A ENA Vector Network Analyzer, Data Sheet</i>	5991-3615EN
<i>E5063A ENA Vector Network Analyzer, Configuration Guide</i>	5991-3616EN
<i>E5063A PCB Analyzer, Technical Overview</i>	5991-3617EN
<i>Keysight Vector Network Analyzer Selection Guide</i>	5989-7603EN

More literature is available on our web site.

## Web Resource

[www.keysight.com/find/vna](http://www.keysight.com/find/vna)

[www.keysight.com/find/ena-pcb](http://www.keysight.com/find/ena-pcb)

[www.keysight.com/find/ecal](http://www.keysight.com/find/ecal)

[www.keysight.com/find/mta](http://www.keysight.com/find/mta)


[www.keysight.com/find/materials](http://www.keysight.com/find/materials)

[www.keysight.com/find/benchvue](http://www.keysight.com/find/benchvue)

## Evolving Since 1939

Our unique combination of hardware, software, services, and people can help you reach your next breakthrough. We are unlocking the future of technology.

From Hewlett-Packard to Agilent to Keysight.

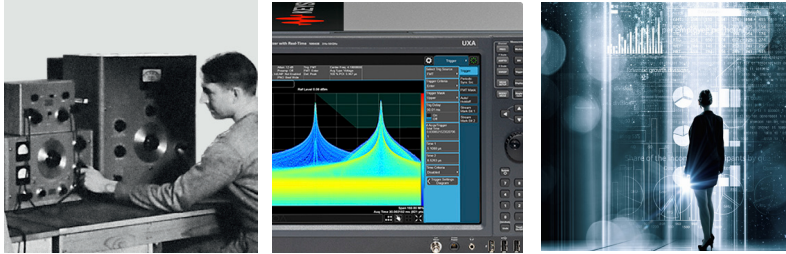

For more information on Keysight Technologies' products, applications or services, please contact your local Keysight office. The complete list is available at: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus)

### Americas

Canada	(877) 894 4414
Brazil	55 11 3351 7010
Mexico	001 800 254 2440
United States	(800) 829 4444

### Asia Pacific

Australia	1 800 629 485
China	800 810 0189
Hong Kong	800 938 693
India	1 800 11 2626
Japan	0120 (421) 345
Korea	080 769 0800
Malaysia	1 800 888 848
Singapore	1 800 375 8100
Taiwan	0800 047 866
Other AP Countries	(65) 6375 8100

### Europe & Middle East

Austria	0800 001122
Belgium	0800 58580
Finland	0800 523252
France	0805 980333
Germany	0800 6270999
Ireland	1800 832700
Israel	1 809 343051
Italy	800 599100
Luxembourg	+32 800 58580
Netherlands	0800 0233200
Russia	8800 5009286
Spain	800 000154
Sweden	0200 882255
Switzerland	0800 805353
	Opt. 1 (DE)
	Opt. 2 (FR)
	Opt. 3 (IT)
United Kingdom	0800 0260637

For other unlisted countries: [www.keysight.com/find/contactus](http://www.keysight.com/find/contactus) (BP-9-7-17)



[www.keysight.com/go/quality](http://www.keysight.com/go/quality)  
Keysight Technologies, Inc.  
DEKRA Certified ISO 9001:2015  
Quality Management System

### myKeysight

#### myKeysight

[www.keysight.com/find/mykeysight](http://www.keysight.com/find/mykeysight)

A personalized view into the information most relevant to you.

[http://www.keysight.com/find/emt\\_product\\_registration](http://www.keysight.com/find/emt_product_registration)

Register your products to get up-to-date product information and find warranty information.



#### Keysight Services

[www.keysight.com/find/service](http://www.keysight.com/find/service)

Keysight Services can help from acquisition to renewal across your instrument's lifecycle. Our comprehensive service offerings—one-stop calibration, repair, asset management, technology refresh, consulting, training and more—helps you improve product quality and lower costs.

#### Keysight Assurance Plans

[www.keysight.com/find/AssurancePlans](http://www.keysight.com/find/AssurancePlans)

Up to ten years of protection and no budgetary surprises to ensure your instruments are operating to specification, so you can rely on accurate measurements.



#### Keysight Channel Partners

[www.keysight.com/find/channelpartners](http://www.keysight.com/find/channelpartners)

Get the best of both worlds: Keysight's measurement expertise and product breadth, combined with channel partner convenience.



This information is subject to change without notice.  
© Keysight Technologies, 2013 - 2018  
Published in USA, April 8, 2018  
5991-3616EN  
[www.keysight.com](http://www.keysight.com)