


# R&S<sup>®</sup> NGU SOURCE MEASURE UNITS

The top-class in supplying power

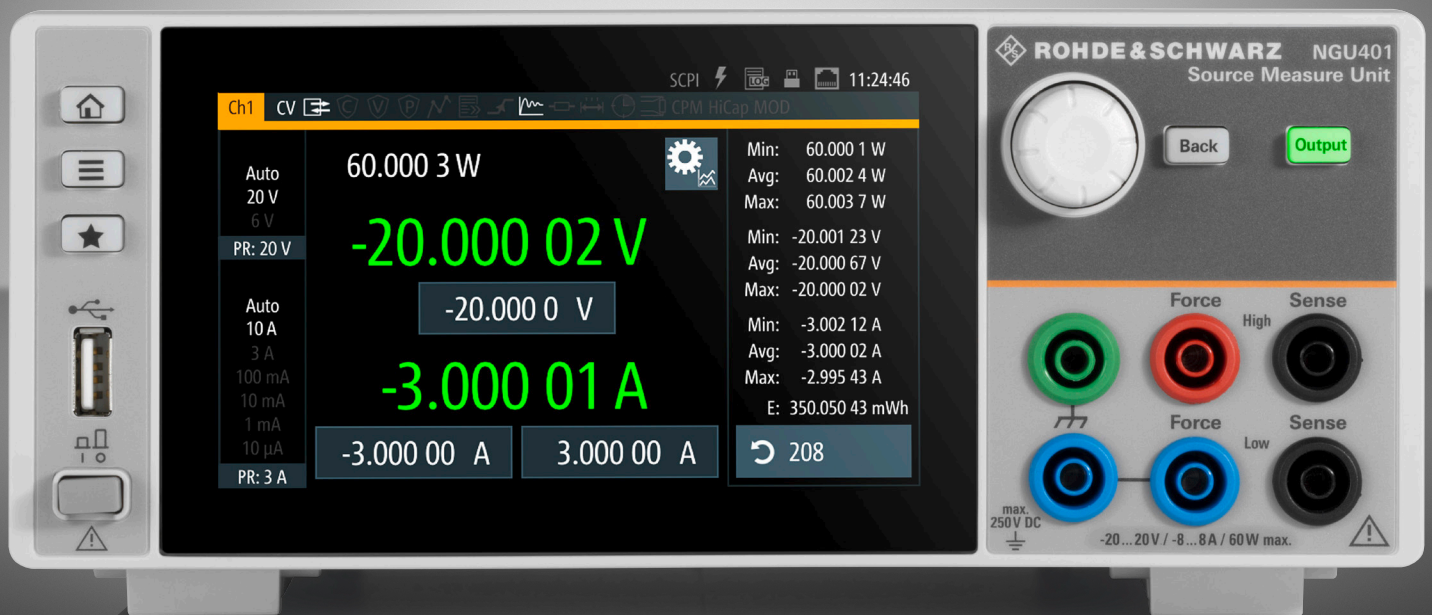

Data Sheet  
Version 02.00

**ROHDE & SCHWARZ**

Make ideas real

**DISTRAME** - Tél. : 03 25 71 25 83 - [infos@distrame.fr](mailto:infos@distrame.fr) - [www.distrame.fr](http://www.distrame.fr)



# AT A GLANCE

Thanks to their extremely high accuracy and fast load recovery time, the R&S®NGU source measure units (SMU) are perfect for challenging applications. A special ammeter design is used to precisely measure current drains from nA to A in one pass – no need to make multiple measurement sweeps. The instruments' short recovery times enable them to handle fast load changes that occur, for example, when mobile communications devices switch from sleep mode to transmit mode. With high speed data acquisition, every detail is detected down to 2  $\mu$ s resolution. The R&S®NGU source measure units provide two- or four-quadrant architecture, allowing them to function both as a source and a sink to simulate batteries and loads.

The two-quadrant R&S®NGU201 and the four-quadrant R&S®NGU4xx provide up to 60 W of output power and sink power, respectively. The channels are floating, galvanically isolated and protected against overload and short circuits.

With six measurement ranges (R&S®NGU411: five ranges) for current and a resolution of up to 6½ digits when measuring voltage, current and power, the R&S®NGU source measure units are perfect for characterizing devices that work from extremely low power consumption to high currents in the ampere range. Using ammeters with feedback-amplifier technology increases accuracy and widens the sensitivity down to the nA range.

With an acquisition rate of up to 500 000 samples per second, even extremely fast variations in voltage or current can be captured.

The instruments provide fast load recovery time of < 30  $\mu$ s combined with minimum overshoot even during a demanding load change.

The linear design of the output stages allows the R&S®NGU source measure units to operate as a source and sink with minimum residual ripple and noise.

The two-quadrant R&S®NGU201 source measure unit is a new member in the family of wireless communications test instruments, mainly designed to supply devices under test with extremely low sleep currents, such as Bluetooth® low energy devices.



It is ideal for powering battery-operated devices due to its adjustable output impedance and fast impedance regulation. The optional battery simulation function provides test conditions that imitate the use of a real battery. An optional voltmeter input makes an additional digital multimeter unnecessary in many applications.

The four-quadrant R&S®NGU401/R&S®NGU411 source measure units are the semiconductor testing specialists for general-purpose applications that span many different industries and many different devices under test. They can act as bipolar power supply or bipolar electronic load. The units come with a modulation input to connect an arbitrary generator, for instance, enabling the instrument to act also as an AC source.

# BENEFITS

## Technology for challenging tasks

► page 5

## R&S®NGU201: the wireless communications specialist

► page 9

## R&S®NGU401/R&S®NGU411: the semiconductor testing specialists

► page 11

## Easy operation

► page 12

## Ideal for use in labs and test systems

► page 13


Model overview			
Parameter	R&S®NGU201	R&S®NGU401	R&S®NGU411
Quadrants	2	4	4
Output voltage	0 V to 20 V	-20 V to +20 V	
Maximum output/sink power	60 W	20 W	
Maximum output/sink current	≤ 6 V: 8 A; > 6 V: 3 A		≤ 10 V: 2 A; > 10 V: 1 A
Load recovery time	< 30 μs		
Maximum acquisition rate	500 ksample/s		



The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Rohde & Schwarz is under license.



# DIFFERENT POWER SUPPLY CLASSES

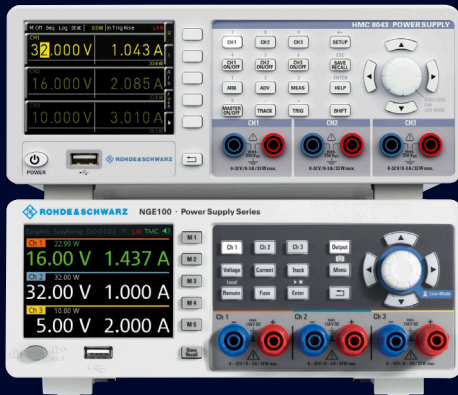

R&S®HMC8043 and R&S®NGE103B  
three-channel power supplies

## Basic power supplies

- ▶ Affordable, quiet and stable
- ▶ For manual operation and simple computer-controlled operation
- ▶ Used in education, on the bench and in system racks



## Performance power supplies

- ▶ When speed, accuracy and advanced programming features are vital to test performance
- ▶ Features such as DUT protection, fast programming times and downloadable time/voltage and time/current sequences
- ▶ Used in labs and ATE applications



R&S®HMP4040 and  
R&S®NGP814 four-channel power supplies

## Specialty power supplies

- ▶ Tailored for specific applications
- ▶ Unique features such as
  - Emulation of unique battery characteristics
  - Electronic loads to accurately sink current and dissipate power in a controlled manner
- ▶ Used in labs and ATE applications



R&S®NGU401 single-channel source measure unit (SMU)  
and R&S®NGM202 two-channel power supply



# TECHNOLOGY FOR CHALLENGING TASKS

## Fast load regulation

Consumer electronics such as mobile phones and IoT devices require very little power in sleep mode. However, the current increases abruptly as soon as the device switches to transmit mode. A power supply used to power such DUTs must be capable of handling load changes from a few nA to the ampere range without creating voltage drops or overshoots.


The R&S®NGU source measure units have a circuit design that allows the user to determine how the instrument regulates load changes. The “Fast” default setting is optimized for speed, achieving recovery times of  $< 30 \mu\text{s}$ . Deactivating “Fast” slightly increases the recovery time, focusing on preventing overshoots under special load conditions.

## Minimum residual ripple and low noise


Advanced electronic circuitry is often very complex and sensitive to interference on the supply lines. In order to supply interference-free voltage to such sensitive DUTs, the power supplies must provide extremely stable output voltages and currents. All types of ripple and noise need to be avoided. The R&S®NGU source measure units have linear regulation and are ideal for sensitive DUTs.

## Optimized load recovery time

Under challenging load conditions, most power supplies respond with slow recovery times and overshoots. Specially developed circuits in the R&S®NGU source measure units achieve a load recovery time of  $< 30 \mu\text{s}$  with minimal overshoot, making them perfect for supplying sensitive components.

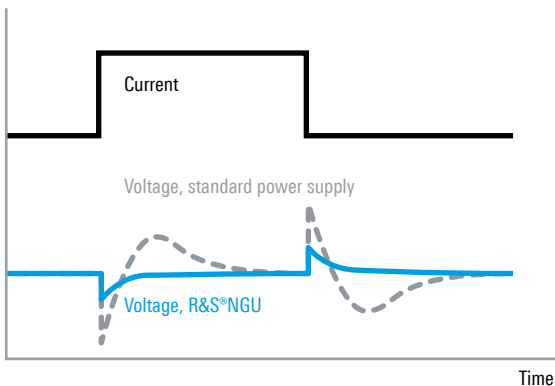

The measured currents and voltages are displayed with  $6\frac{1}{2}$  digit resolution. Two voltage measurement ranges and six current measurement ranges (R&S®NGU411: five ranges) provide extremely high accuracy and resolutions down to  $1 \mu\text{V}/100 \text{ pA}$ .

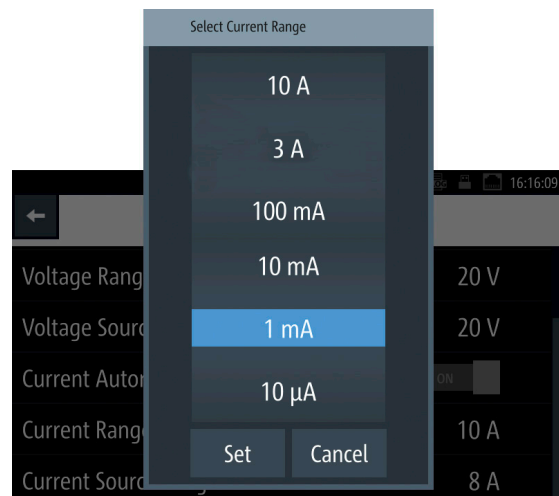

### Readings with up to 6½ digit resolution

With a resolution of up to 6½ digits when measuring voltage, current and power, the R&S®NGU source measure units are perfect for characterizing devices that have low power consumption in standby mode and high current in full load operation. Two voltage measurement ranges and six current measurement ranges (R&S®NGU411: five ranges) provide extremely high accuracy and resolutions down to 1 µV/100 pA.

### Galvanically isolated, floating outputs

The outputs of the R&S®NGU source measure units are not connected to chassis ground, and are galvanically isolated and protected against overload and short circuits.

### Output stage isolated with relays

Switching off an output channel of a standard power supply usually simply switches off the output voltage. The output stage of the supply remains connected to the output terminals. The R&S®NGU source measure units use relays to isolate the SMU circuits from the connector sockets.

### Voltage priority and current priority mode

Configuring and regulating the output voltage (constant voltage mode) is the standard application for power supplies. Most power supplies can also be used in constant current mode, where current limiting ensures that only the configured current can flow.


However, these devices are not optimized for fast current limiting. There is a risk of damage to sensitive DUTs due to excessive currents from overshoots in current regulation. To avoid this risk, the R&S®NGU source measure units have separate operating modes for voltage and current regulation.

In voltage priority mode, fast voltage regulation provides short recovery times of less than 30 µs. Current regulation is designed to be somewhat slower to avoid a tendency to oscillation.

When precise and quick current regulation is desired, the R&S®NGU source measure units can be operated in current priority mode. Optimized for fast current regulation (load recovery time < 50 µs), this mode allows tasks such as LED testing, which are sensitive to even short current spikes.


### Voltage priority mode

The standard mode of power supplies provides fast voltage regulation with the risk of overshoots in current.

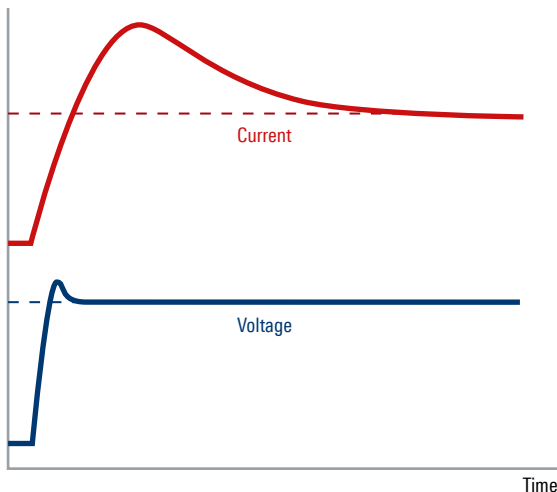

### Current priority mode

A special mode for current-sensitive DUTs provides fast current regulation. It is the right choice when you have to avoid excessively high currents to protect your DUT.

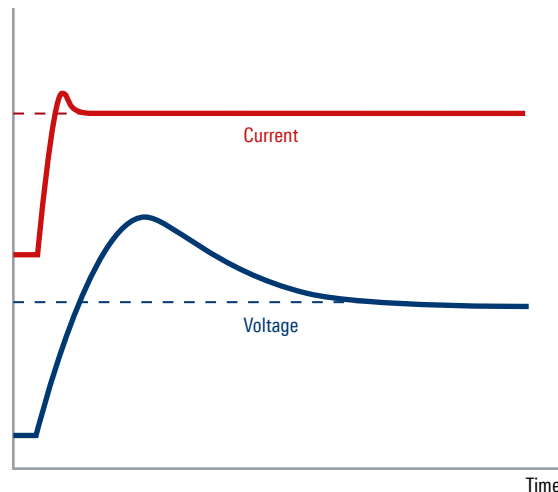

### High-capacitance mode

Quite often in a typical measurement configuration, there is a capacitance at the input of the DUT. Connecting the power supply by leads results in a low pass behavior formed by the leads and the capacitance.


Providing the high-capacitance mode, the R&S®NGU source measure units compensate the capacitance and display the current directly at the DUT.

### High speed acquisition (FastLog function)


The R&S®NGU source measure units offer the FastLog function to capture voltage and current measurement results. This data can be stored on an external USB storage device or can be transferred to an external PC via USB or LAN. With an acquisition rate of up to 500 ksamples/s, voltage and current results are available every 2 μs.

Thanks to this FastLog function, even spikes in the micro-second range that cannot be detected with slower instruments can be detected in min./max. values.


### FastLog high-speed acquisition

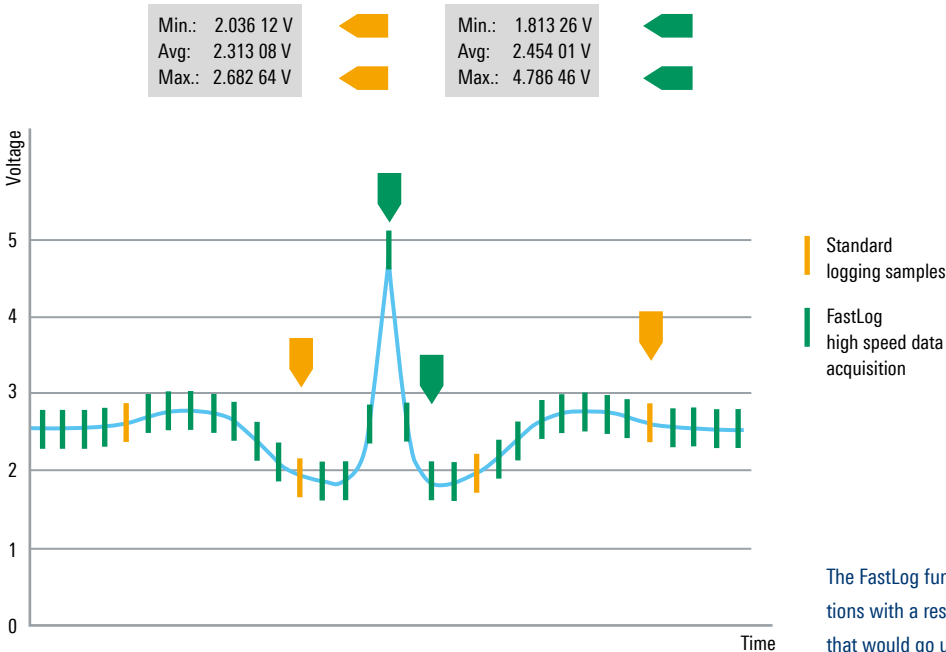

Various parameters can be set at the outputs of the R&S®NGU source measure units, for example the output impedance, a delay to switch on the outputs and different trigger modes.

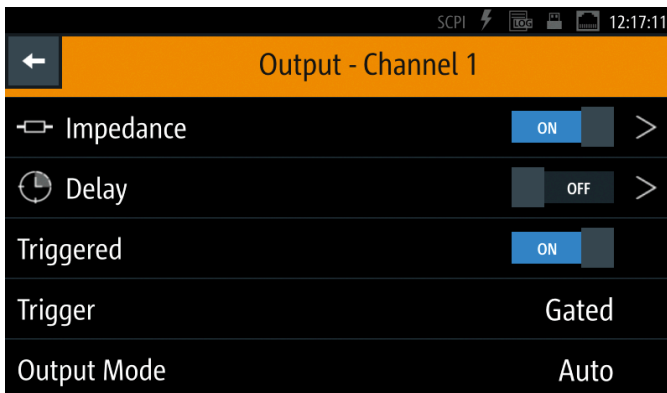

The FastLog function provides an acquisition rate up to 500 ksamples/s.

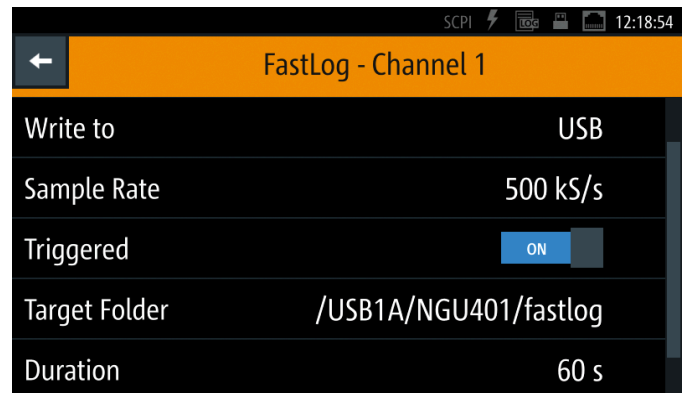



## Protection functions to safeguard instrument and DUT

The R&S®NGU source measure units provide protection functions to make sure the DUT and the instrument are not damaged in the event of a fault. The output channels are protected against overload and short circuits. The maximum voltage, current and power can be set. When an output reaches the set limit, it is automatically switched off and a message is displayed.

### Overvoltage protection (OVP)

If the voltage exceeds the configured maximum value, the channel is switched off and the corresponding symbol flashes on the display. In current priority mode, different limits can be set for source and sink mode.

### Overcurrent protection (electronic fuse, OCP)

To better protect sensitive loads, the channels of the R&S®NGU source measure units provide electronic fuses that can be set individually. If the channel current exceeds the set current, the channel is automatically switched off and the overcurrent symbol flashes.

Electronic fuses can be set in source and in sink mode with different values.

There are two settings to define the response behavior of the electronic fuses. The “Fuse Delay At Output-On” specifies how long the fuse remains inactive after the channel is activated. The sensitivity of the fuse is specified using the “Fuse Delay Time”. This allows users to modify the behavior of the power supply to prevent a channel from being switched off due to a short current spike during operation.

### Overpower protection (OPP)

Alternatively, instead of the maximum voltage, the maximum power can be set and used as the switch-off parameter.


### Overtemperature protection (OTP)

The R&S®NGU source measure units have internal over-temperature protection that switches the instrument off if a thermal overload is imminent.

## Safety limits to safeguard the DUT

To prevent a DUT from being destroyed by too high voltages or currents, safety limits can be set on the R&S®NGU source measure units. Before starting the actual measuring task, the user can limit the instrument to values that are not dangerous for the DUT.

Electronic fuse with additional functions: “Fuse Delay At Output-On” specifies how long the fuse remains inactive after the channel is activated. The sensitivity of the fuse is specified using the “Fuse Delay Time”. Different limits can be set for source and sink mode.

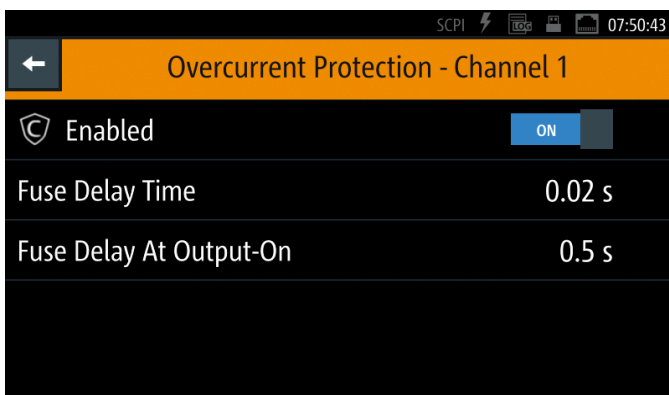

The user can set safety limits to limit the adjustment range of the instrument and prevent a DUT from being damaged due to accidentally using the wrong setting.



# R&S®NGU201: THE WIRELESS COMMUNICATIONS SPECIALIST

The R&S®NGU201 source measure unit is tuned for battery drain analysis of any battery-powered device up to 60 W, including mobile phones, tablets and IoT devices, for example. Furthermore, it can be used for battery tests and simulations, thanks to its adjustable output impedance and optional battery simulation tool.

## Two quadrants: operates as source and sink

The two-quadrant architecture of this source measure unit allows it to function both as a source and a sink and simulate batteries or loads. The source measure unit automatically switches from source mode to sink mode. As soon as the externally applied voltage exceeds the set nominal voltage, current flows into the instrument. This is indicated by a negative current reading.

## Variable output impedance and constant resistance mode

A power supply should have an output impedance as low as possible to suppress loading effects on the DUT. However, there are applications where certain battery types need to be simulated in a controlled manner or where it is necessary to simulate the increase in internal impedance as the battery discharges. The R&S®NGU201 source measure unit supports these applications, thanks to its adjustable output impedance range.


The output impedance is regulated very fast. Especially in the range from  $-50 \text{ m}\Omega$  to  $2 \text{ }\Omega$ , recovery times of  $< 200 \text{ }\mu\text{s}$  can be achieved.

When operating as an electronic load, constant resistance mode is also available. In this mode, the instrument behaves like an adjustable resistance over the entire load range. This makes it possible to simulate battery discharge with a constant load resistance, for example.

## Digital voltmeter (DVM) function

While the R&S®NGU201 source measure unit measures the voltage supplied to the DUT, the R&S®NGU-K104 option activates a port that allows an additional internal DVM function to be connected to any other point in the circuitry. This DVM function runs in parallel to the read-back function, and is galvanically separated from the channel circuitry. In many cases, an additional digital multimeter is not necessary.

The large high-resolution display makes it easy to read the voltage and current values (even at great distances) and provides a lot of additional information.

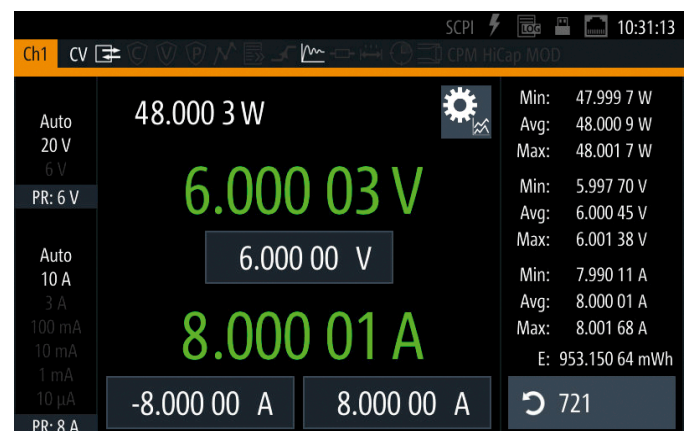

## Battery simulation

Real batteries show different characteristics depending on the type of battery and its charging condition. Capacity, open circuit voltage (Voc) and equivalent series resistance (ESR) are important battery characteristics that depend on its state of charge (SoC). The R&S®NGU-K106 option allows users to simulate the behavior of batteries under different charging conditions, e.g. when powering a DUT.


To define a battery model, the data of the battery can be entered easily using the integrated battery model editor. Data sets for the common battery types (Pb, lithium-ion, NiCd and NiMH) are available as preconfigured files. These can be easily modified according to the needs of a specific application. Additional battery model data sets can be loaded from a USB device and stored on the R&S®NGU201 source measure unit.

In particular, when battery-operated devices have to be optimized for lifecycle, the discharging behavior of the battery type needs to be considered. The battery simulator function of the R&S®NGU201 makes it possible to simulate the real battery output performance. Testing can be based on a selected battery model, and battery capacity, SoC and Voc can be set to any state to test the device under specific circumstances.

The charging behavior of a battery can also be simulated. This is particularly important when designing battery chargers. In this application, the R&S®NGU201 source measure unit is used in sink mode.

Both cases provide dynamic simulation, meaning Voc, ESR and SoC change according to charging/discharging conditions like a real battery. The state of charge is shown graphically; all other values are displayed numerically.

Battery simulation: the main parameters to characterize a battery's condition are summarized in one display.

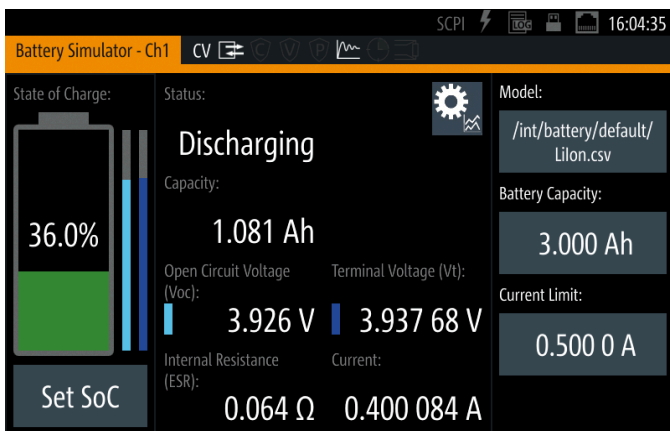

The battery simulation software includes data sets of common battery types that can be easily modified.

The screenshot shows a table of battery parameters for different State of Charge (SoC) levels. The table has three columns: State of Charge (SoC), Open-Circuit Voltage (Voc), and Internal Resistance (ESR). The data is as follows:

State of Charge (SoC)	Open-Circuit Voltage (Voc)	Internal Resistance (ESR)
97 %	4.189 V	0.063 Ω
98 %	4.193 V	0.064 Ω
99 %	4.196 V	0.065 Ω
100 %	4.199 V	0.066 Ω



# R&S®NGU401/R&S®NGU411: THE SEMICONDUCTOR TESTING SPECIALISTS

The R&S®NGU401/R&S®NGU411 source measure units are the specialists for semiconductor testing. They are designed for general-purpose applications that span many different industries and many different devices under test. Both source measure units can act as bipolar power supplies or bipolar electronic loads.


## Four quadrants: source or sink operation with arbitrary polarity

With its four-quadrant architecture, the R&S®NGU401/R&S®NGU411 can supply positive or negative voltages or currents and can act as a source or sink in both polarities. This enables tasks such as measuring the forward and reverse characteristics of semiconductor devices in a single test operation without having to make changes to the circuit.

The power supplies automatically switch from source mode to sink mode. When the applied external voltage exceeds the set output voltage, current flows into the device. This is indicated by the opposite sign for current measurement.

## Modulation input

The R&S®NGU401/R&S®NGU411 source measure unit provides a modulation input to connect an arbitrary generator, for instance. The output follows the modulation input signal, enabling the instrument to act as an AC source or be used to simulate glitches or unstable conditions.

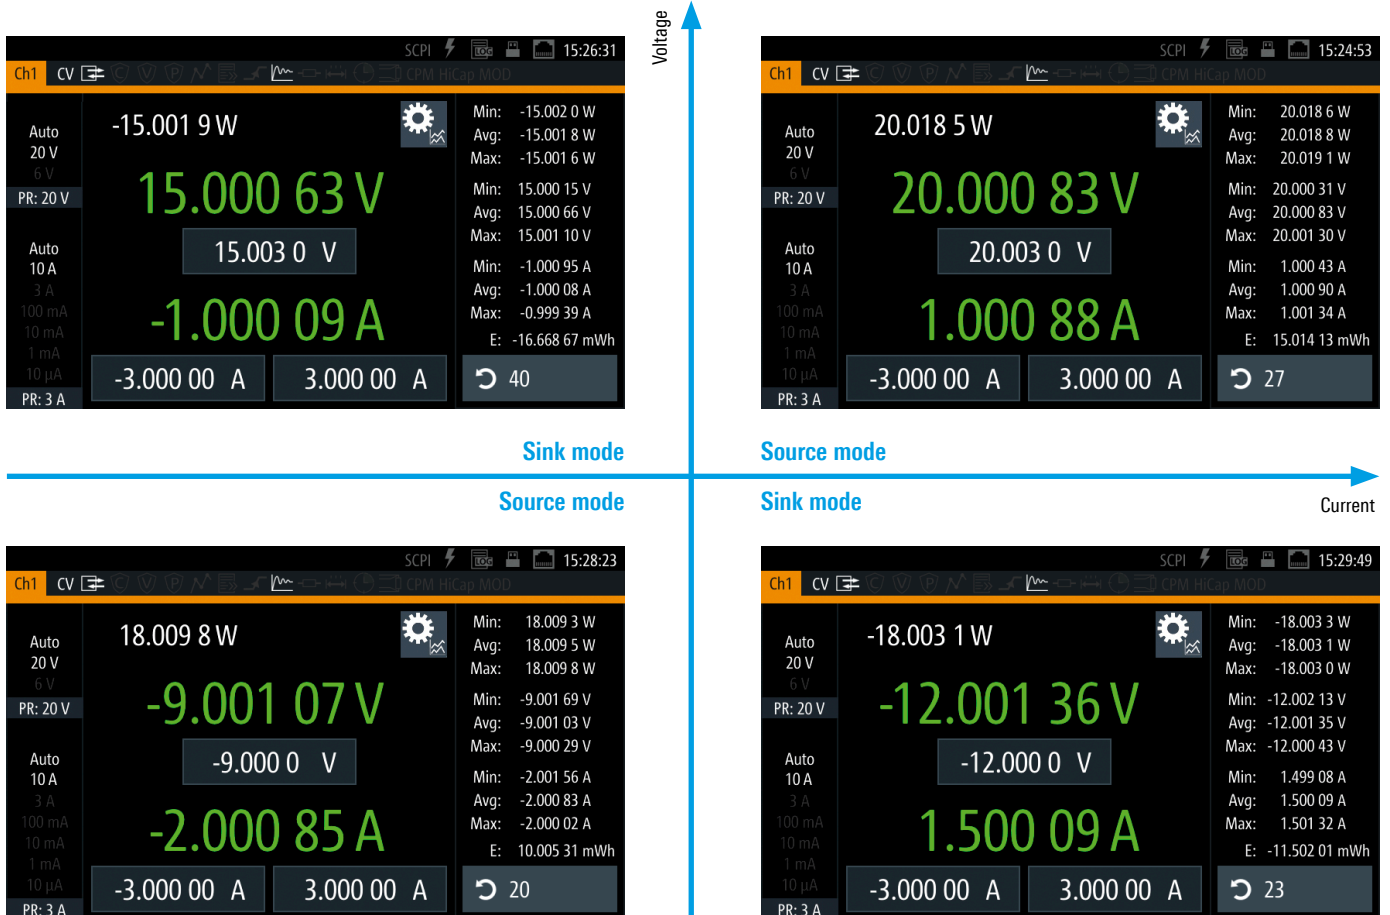

# EASY OPERATION

## High-resolution touchscreen

The large capacitive touchscreen is the central operating element of the R&S®NGU source measure units. Lightly tapping a numerical value will display a virtual keyboard to input the desired value. Alternatively, the voltage, current and limits for the various protection functions can be set using the rotary knob. Accessing menus to configure settings is only necessary for special functions that are needed less frequently.

With a very high resolution, the display sets new standards for this class of instruments. This makes it easy to read the voltage and current values, even at long distances. A variety of additional information such as power values and statistics can also be displayed. Icons clearly show the status of the actual configuration.

## Color coding of operating modes

Colors are used to indicate the different modes. For example, an active channel in constant voltage mode light up green, while red is used for constant current mode. When the instrument is in constant resistance mode, the numbers are displayed in cyan.


## Graphical display

The large display can also be used for graphics. Up to four measurement functions can be selected and plotted versus time, and minimum and maximum values can additionally be marked.

## QuickArb function

Some applications require the voltage or the current to be varied during a test sequence, for example when simulating different charging conditions of a battery. The QuickArb function allows users to manually configure time/voltage or time/current sequences via the user interface or to program them via external interfaces.

Numerical values can be entered using the virtual touchscreen keyboard or the rotary knob.

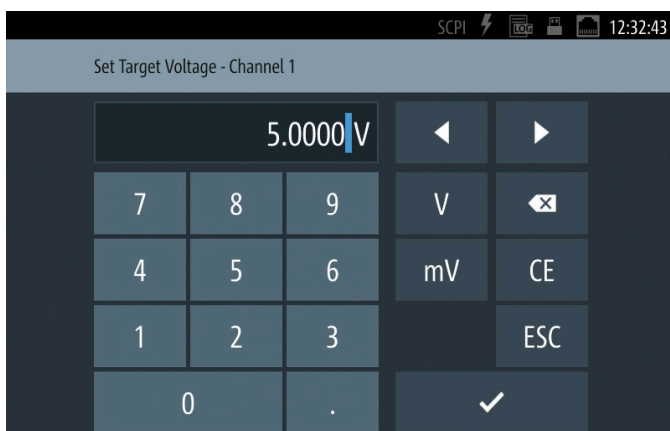

The QuickArb function of the R&S®NGU source measure units sets new standards: 2048 points are supported per cycle. It is also possible to interpolate between the discrete points and select whether the sequence of voltage values 1 V – 2 V – 3 V is to be run as steps, or whether the voltage values are to be increased using linear interpolation.

Arb sequences can be programmed to run much faster with the R&S®NGU than with standard power supplies.

The dwell time for a single voltage or current value can be set with a resolution of up to 100 µs. This makes it possible to program very short drops in voltage to test the power-up behavior of a DUT. The dwell times can also be set in the range of hours to implement test sequences extending over days or weeks for long-term testing.


## EasyRamp function

Sometimes test sequences have to simulate operating conditions where the abrupt rise of the supply voltage has to be avoided. The EasyRamp function of the R&S®NGU source measure units provides the solution. The output voltage can be increased continuously within a timeframe of 10 ms to 10 s. The EasyRamp function can be operated both manually and remotely.

## Save and recall instrument settings

The save and recall functions make it easy to save and recall frequently used settings.

The high-resolution display can also be used for graphical presentations; in this example the charging current of a capacitor is displayed while the voltage is increased stepwise.

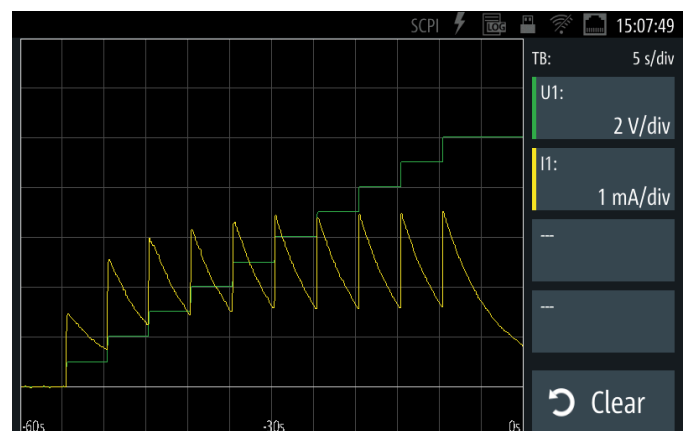

# IDEAL FOR USE IN LABS AND TEST SYSTEMS

## Tailored for use in labs and system racks

The R&S®NGU source measure units are the right choice for challenging applications. They are used in R&D labs and integrated into production test systems.

The instruments can be installed in 19" racks using the R&S®HZN96 rack adapter. Connectors on the rear panel and a compact design are important criteria for use in test systems.

## Remote sensing

There is often a significant voltage drop over the supply leads, especially in applications with high current consumption. Since power supplies usually maintain a constant output voltage, the voltage on the DUT will be lower than the voltage displayed on the power supply. The remote sensing function compensates this voltage drop over the supply leads. The voltage actually present at the load is measured by an additional pair of sense lines, and this value is used to regulate the voltage directly at the load.

## Front and rear connectors

The safety sockets on the front panel of the R&S®NGU source measure units are designed for 4 mm banana plugs. Additional connections (including sense lines) are provided on the rear panel to simplify use in rack systems.

Digital inputs and outputs are optionally available. They can be used as trigger/inhibit inputs and control/fault outputs. The hardware of the R&S®NGU-K103 option is pre-installed. The function can be activated using a keycode (to be ordered separately).

## Full remote capabilities

For use in test systems, the R&S®NGU source measure units can be remotely controlled. The following interfaces are available.

### USB and LAN

USB and LAN (Ethernet) interfaces are installed as standard. All supply parameters can be remotely controlled via these interfaces.

### IEEE-488 (GPIB) interface (R&S®NGU-B105 option)

The R&S®NGU-B105 interface with an IEEE-488 (GPIB) port is available as an option that can be ordered ex-factory.

## Fast on the bus and on the bench


Complicated measurement sequences require ever faster setting, measuring and command processing times. The R&S®NGU source measure units meet these needs. Thanks to a state-of-the-art multicore architecture, they not only process control commands much faster than conventional power supplies, they process them internally in parallel. Users benefit from this in ATE systems. There are also advantages in manual operation, such as faster sequences in Arb mode.

## Advanced instrument design: compact form factor, quiet operation

There is never enough space on the bench or in the rack. The R&S®NGU source measure units take up very little space thanks to their compact design.

Since the built-in fan is temperature-controlled, it often runs at a low speed or powers down completely, resulting in very low operating noise.

All connections are also provided on the rear panel (example: R&S®NGU with IEEE-488 option installed).

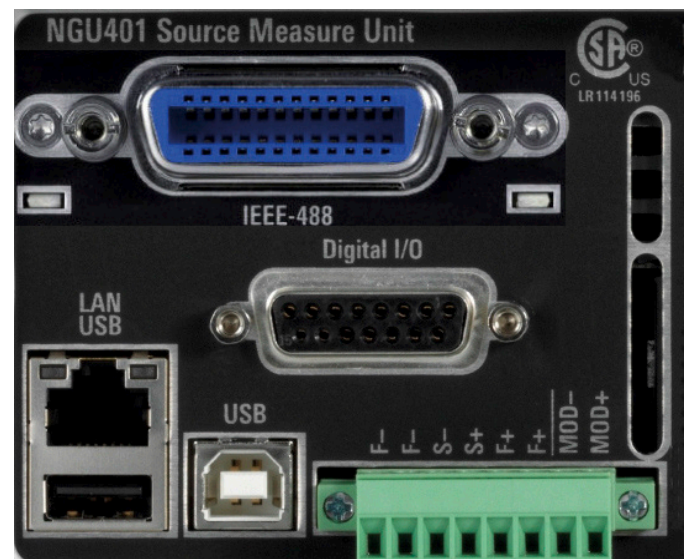



# SPECIFICATIONS

## Definitions


### General

Product data applies under the following conditions:

- ▶ Three hours storage at ambient temperature followed by 30 minutes warm-up operation
- ▶ All data is valid at +23°C (-3°C/+7°C) after 30 minutes warm-up time.
- ▶ Specified environmental conditions met
- ▶ Recommended calibration interval adhered to
- ▶ All internal automatic adjustments performed, if applicable

### Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as  $<$ ,  $\leq$ ,  $>$ ,  $\geq$ ,  $\pm$ , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

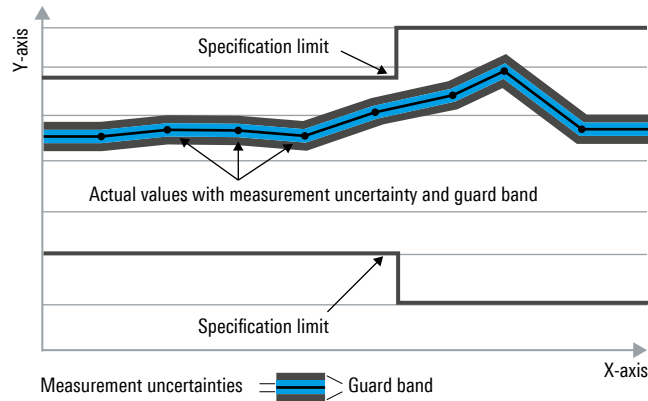

### Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (for example, dimensions or resolution of a setting parameter). Compliance is ensured by design.

### Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with  $<$ ,  $>$  or as a range, it represents the performance met by approximately 80% of the instruments at production time. Otherwise, it represents the mean value.

### Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (for example, nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

### Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

### Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are indicated as follows: "parameter: value".

Typical data as well as nominal and measured values are not warranted by Rohde&Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (MSPS) or thousand symbols per second (kSPS), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, MSPS, kbps, kSPS and Msample/s are not SI units.

All data is valid at +23°C (-3°C/+7°C) after 30 minutes warm-up time.

<b>Electrical specifications</b>		
<b>Outputs</b>	The channel outputs are galvanically isolated and not connected to ground.	
Number of output channels		1
Maximum output power		60 W (R&S®NGU411: 20 W)
Output voltage	R&S®NGU201	0 V to 20 V
	R&S®NGU401/R&S®NGU411	-20 V to +20 V
Maximum output current	≤ 6 V output voltage	8 A (R&S®NGU411: ≤ 10 V: 2 A)
	> 6 V output voltage	3 A (R&S®NGU411: > 10 V: 1 A)
Adjustable output impedance	R&S®NGU201	-50 mΩ to 100 Ω
Increments	R&S®NGU201	1 mΩ
Recovery time	R&S®NGU201: ≤ 2 Ω, resistive load	< 200 μs (meas.)
	R&S®NGU201: > 2 Ω, resistive load	< 10 ms (meas.)
Adjustable output impedance	R&S®NGU401/R&S®NGU411	not available
Voltage ripple and noise	20 Hz to 20 MHz	< 500 μV (RMS), < 2 mV (peak-to-peak) (meas.)
Current ripple and noise	20 Hz to 20 MHz	< 1 mA (RMS) (meas.)
<b>Electronic load</b>		
Sink voltage range	R&S®NGU201	0 V to 20 V
	R&S®NGU401/R&S®NGU411	-20 V to +20 V
Maximum sink power		60 W (R&S®NGU411: 20 W)
Maximum sink current	voltage: ≤ 6 V	8 A (R&S®NGU411: ≤ 10 V: 2 A)
	voltage: > 6 V	3 A (R&S®NGU411: > 10 V: 1 A)
Sink modes	R&S®NGU201	constant voltage, constant current, constant resistance
	R&S®NGU401/R&S®NGU411	constant voltage, constant current
Constant resistance range	R&S®NGU201	0 Ω to 10 kΩ (0.1 Ω increments)
<b>Load regulation in voltage priority mode</b>	load change: 10% to 90%	
Voltage	±(% of output + offset)	< 0.01% + 0.5 mV
Voltage load recovery time in standard mode	regulation to within a band of ±20 mV of the set voltage	< 30 μs (meas.)
Voltage load recovery time in high-capacity mode	regulation to within a band of ±20 mV of the set voltage	10 μF to 50 μF (mode low): < 30 μs (meas.), > 50 μF to 470 μF (mode high): < 100 μs (meas.)
<b>Load regulation in current priority mode</b>	load change: 10% to 90%	
Current	±(% of output + offset)	< 0.01% + 0.1 mA
Current load recovery time	regulation to within a band of ±20 mA of the set current	< 50 μs (meas.)
<b>Rise time</b>	10% to 90% of rated output voltage, resistive load	full load: < 100 μs (meas.), no load: < 100 μs (meas.)
<b>Fall time</b>	90% to 10% of rated output voltage, resistive load	full load: < 100 μs (meas.), no load: < 100 μs (meas.)
<b>Minimum pulse width</b>		100 μs
<b>Programming resolution</b>		
Voltage		20 V range: 200 μV, 6 V range: 50 μV
Current		8 A range: 50 μA (not for R&S®NGU411), 3 A range: 25 μA (R&S®NGU411: 2 A range), 100 mA range: 1 μA, 10 mA range: 100 nA
<b>Programming accuracy</b>		
Voltage	±(% of setting + offset)	20 V range: < 0.02% + 2 mV, 6 V range: < 0.02% + 1 mV
Current	±(% of setting + offset)	8 A range: < 0.05% + 2 mA (not for R&S®NGU411), 3 A range: < 0.025% + 500 μA (R&S®NGU411: 2 A range), 100 mA range: < 0.025% + 25 μA, 10 mA range: < 0.025% + 10 μA

<b>Output measurements</b>		
Measurement functions		voltage, current, power, energy
<b>Readback resolution</b>		
Voltage		20 V range: 10 $\mu$ V, 6 V range: 1 $\mu$ V
Current		10 A range: 10 $\mu$ A (not for R&S <sup>®</sup> NGU411), 3 A range: 1 $\mu$ A (R&S <sup>®</sup> NGU411: 2 A range), 100 mA range: 100 nA, 10 mA range: 10 nA, 1 mA range: 1 nA, 10 $\mu$ A range: 100 pA
<b>Readback accuracy</b>		
Voltage	$\pm$ (% of output + offset)	20 V range: < 0.02% + 2 mV, 6 V range: < 0.02% + 500 $\mu$ V
Current	$\pm$ (% of output + offset)	10 A range: < 0.025% + 500 $\mu$ A (not for R&S <sup>®</sup> NGU411), 3 A range: < 0.025% + 250 $\mu$ A (R&S <sup>®</sup> NGU411: 2 A range), 100 mA range: < 0.025% + 15 $\mu$ A, 10 mA range: < 0.025% + 1.5 $\mu$ A, 1 mA range: < 0.025% + 150 nA, 10 $\mu$ A range: < 0.025% + 15 nA
<b>Temperature coefficient (per °C)</b>		
Voltage	+5 °C to +20 °C and +30 °C to +40 °C	0.15 $\times$ specification/°C
Current		0.15 $\times$ specification/°C
<b>Remote sensing</b>		
Maximum sense compensation	20 V range	2 V (meas.)
		yes
<b>Ratings</b>		
Maximum voltage to ground		250 V DC
Maximum counter voltage	voltage with the same polarity connected to the outputs	
	R&S <sup>®</sup> NGU201	22 V
	R&S <sup>®</sup> NGU401/R&S <sup>®</sup> NGU411	$\pm$ 22 V
Maximum reverse voltage	voltage with opposite polarity connected to the outputs	
	R&S <sup>®</sup> NGU201	0.5 V
Maximum reverse current	for 5 minutes (max.)	
	R&S <sup>®</sup> NGU201	3 A
<b>Remote control</b>		
Command processing time		< 6 ms (nom.)
<b>Protection functions</b>		
Overvoltage protection		adjustable
Overpower protection		adjustable
Overcurrent protection (electronic fuse)		adjustable
Programming resolution		0.1 mA
Response time	( $I_{load} > I_{resp} \times 2$ ) at $I_{load} \geq 2$ A	< 1.5 ms (meas.)
Fuse delay at output-on		0 ms to 10 s (1 ms increments)
Fuse delay time		0 ms to 10 s (1 ms increments)
Overtemperature protection		yes

<b>Special functions</b>		
<b>Output ramp function</b>		EasyRamp
EasyRamp time		10 ms to 10 s (10 ms increments)
<b>Output delay</b>		
Delay per channel		1 ms to 10 s (1 ms increments)
<b>Arbitrary function</b>		QuickArb
Parameters		voltage, current, time
Maximum number of points		2048
Dwell time		100 $\mu$ s to 10 h (100 $\mu$ s increments)
Repetition		continuous or burst mode with 1 to 65 535 repetitions
Trigger		manually via the keyboard, via remote control or via optional interface
<b>Statistics (sampling time)</b>	voltage	minimum, maximum, average (2 $\mu$ s)
	current	minimum, maximum, average (2 $\mu$ s)
	power	minimum, maximum, average (2 $\mu$ s)
	energy	(2 $\mu$ s)
<b>Digital trigger and control interfaces</b>		digital I/O, R&S <sup>®</sup> NGU-K103
Maximum voltage (IN/OUT)		24 V
Pull-up resistors (IN/OUT)	connected to 3.3 V	20 k $\Omega$
Input level	low	< 0.8 V (nom.)
	high	> 2.4 V (nom.)
Maximum drain current (OUT)		500 mA
<b>Modulation input</b>	R&S <sup>®</sup> NGU401/R&S <sup>®</sup> NGU411	yes
Maximum voltage to ground/channel		250 V DC
Modulation bandwidth	R&S <sup>®</sup> NGU401/R&S <sup>®</sup> NGU411	DC to 500 Hz
Input level	R&S <sup>®</sup> NGU401/R&S <sup>®</sup> NGU411	-24 V to +24 V
Accuracy (displayed modulation value)	R&S <sup>®</sup> NGU401/R&S <sup>®</sup> NGU411	< 0.02% + 2 mV
<b>Data logging standard mode</b>		
Maximum acquisition rate	each recorded sample is the average of 50 000 measured values	10 sample/s
Memory depth		internal 800 Mbyte or external memory size
Voltage resolution		see readback resolution
Voltage accuracy		see readback accuracy
Current resolution		see readback resolution
Current accuracy		see readback accuracy
<b>Data logging fast mode</b>		FastLog
Maximum acquisition rate	for voltage, current	500 ksample/s (2 $\mu$ s)
Memory depth		external memory size
Voltage resolution		20 V range: 20 $\mu$ V, 6 V range: 5 $\mu$ V
Voltage accuracy	$\pm$ (% of output + offset)	20 V range: < 0.02% + 2 mV, 6 V range: < 0.02% + 500 $\mu$ V
Current resolution		10 A range: 20 $\mu$ A (not for R&S <sup>®</sup> NGU411), 3 A range: 2 $\mu$ A (R&S <sup>®</sup> NGU411: 2 A range), 100 mA range: 200 nA, 10 mA range: 20 nA, 1 mA range: 2 nA, 10 $\mu$ A range: 200 pA
Current accuracy	$\pm$ (% of output + offset)	10 A range: < 0.025% + 500 $\mu$ A (not for R&S <sup>®</sup> NGU411), 3 A range: < 0.025% + 250 $\mu$ A (R&S <sup>®</sup> NGU411: 2 A range), 100 mA range: < 0.025% + 15 $\mu$ A, 10 mA range: < 0.025% + 1.5 $\mu$ A, 1 mA range: < 0.025% + 150 nA, 10 $\mu$ A range: < 0.025% + 15 nA
<b>Digital voltmeter input</b>	R&S <sup>®</sup> NGU201	optional, R&S <sup>®</sup> NGU-K104
DVM voltage		-24 V to +24 V
DVM accuracy	$\pm$ (% of output + offset)	< 0.02% + 2 mV
Maximum voltage to ground/channel		250 V DC

Display and interfaces		
Display		TFT 5" 800 × 480 pixel WVGA touch
Front panel connections		4 mm safety sockets
Rear panel connections		8-pin connector block
Remote control interfaces	standard	USB-TMC, USB-CDC (virtual COM port) LAN
	R&S®NGU-B105	IEEE-488 (GPIB)

General data		
Environmental conditions		
Temperature	operating temperature range	+5°C to +40°C
	storage temperature range	-20°C to +70°C
Humidity	noncondensing	5% to 95%
Operating altitude		max. 2000 m above sea level
Power rating		
Mains nominal voltage		100 V/115 V/230 V (± 10%)
Mains frequency		50 Hz to 60 Hz
Maximum power consumption		400 W
Mains fuses		2 × T4.0H/250 V
Product conformity		
Electromagnetic compatibility	EU: in line with EMC Directive 2014/30/EU	applied standards: ► EN 61326-1 ► EN 55011 (Class A)
	Korea	KC mark
Electrical safety	EU: in line with Low Voltage Directive 2014/35/EU	applied harmonized standard: EN 61010-1
	USA, Canada	CSA-C22.2 No. 61010-1
RoHS	in line with EU Directive 2011/65/EU	EN IEC 63000
Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, 0.3 mm (peak-to-peak) 55 Hz to 150 Hz, 0.5 g const., in line with EN 60068-2-6
	wideband noise	8 Hz to 500 Hz, acceleration: 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method 516.4, procedure I
Mechanical data		
Dimensions	W × H × D	222 mm × 97 mm × 436 mm (8.74 in × 3.82 in × 17.17 in)
Weight		7.1 kg (15.6 lb)
Rack installation		R&S®HZN96 option
Recommended calibration interval	operation 40 h/week over entire range of specified environmental conditions	1 year

R&S®NGU201, front view



R&S®NGU401, front view



R&S®NGU201, rear view





# ORDERING INFORMATION

Designation	Type	Order No.
<b>Base unit</b>		
Two-quadrant source measure unit	R&S®NGU201	3639.3763.02
Four-quadrant source measure unit, 60 W	R&S®NGU401	3639.3763.03
Four-quadrant source measure unit, 20 W	R&S®NGU411	3639.3763.04
<b>Accessories supplied</b>		
Power cable, quick start guide		
<b>Options for R&amp;S®NGU201</b>		
Digital trigger I/O	R&S®NGU-K103	3662.9335.02
Digital voltmeter function	R&S®NGU-K104	3663.0390.02
IEEE-488 (GPIB) interface	R&S®NGU-B105	3661.0763.02
Battery simulation	R&S®NGU-K106	3663.0625.02
<b>Options for R&amp;S®NGU401/R&amp;S®NGU411</b>		
Digital trigger I/O	R&S®NGU-K103	3662.9335.02
IEEE-488 (GPIB) interface	R&S®NGU-B105	3661.0763.02
<b>System components</b>		
19" rack adapter, 2 HU	R&S®HZN96	3638.7813.02

<b>Warranty</b>		
Base unit		3 years
All other items <sup>1)</sup>		1 year
<b>Options</b>		
Extended warranty, one year	R&S®WE1	
Extended warranty, two years	R&S®WE2	
Extended warranty with calibration coverage, one year	R&S®CW1	Please contact your local Rohde & Schwarz sales office.
Extended warranty with calibration coverage, two years	R&S®CW2	
Extended warranty with accredited calibration coverage, one year	R&S®AW1	
Extended warranty with accredited calibration coverage, two years	R&S®AW2	

## Extended warranty with a term of one and two years (WE1 and WE2)

Repairs carried out during the contract term are free of charge<sup>2)</sup>. Necessary calibration and adjustments carried out during repairs are also covered.

## Extended warranty with calibration coverage (CW1 and CW2)

Enhance your extended warranty by adding calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated, inspected and maintained during the term of the contract. It includes all repairs<sup>2)</sup> and calibration at the recommended intervals as well as any calibration carried out during repairs or option upgrades.

## Extended warranty with accredited calibration (AW1 and AW2)

Enhance your extended warranty by adding accredited calibration coverage at a package price. This package ensures that your Rohde & Schwarz product is regularly calibrated under accreditation, inspected and maintained during the term of the contract. It includes all repairs<sup>2)</sup> and accredited calibration at the recommended intervals as well as any accredited calibration carried out during repairs or option upgrades.

<sup>1)</sup> For options installed, the remaining base unit warranty applies if longer than 1 year. Exception: all batteries have a 1 year warranty.

<sup>2)</sup> Excluding defects caused by incorrect operation or handling and force majeure. Wear-and-tear parts are not included.

## Service at Rohde & Schwarz You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

### Rohde & Schwarz

The Rohde&Schwarz technology group is among the trail-blazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks&cybersecurity. Founded more than 85 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

[www.rohde-schwarz.com](http://www.rohde-schwarz.com)

### Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

**ISO 9001**

### Rohde & Schwarz training

[www.training.rohde-schwarz.com](http://www.training.rohde-schwarz.com)

### Rohde & Schwarz customer support

[www.rohde-schwarz.com/support](http://www.rohde-schwarz.com/support)



## DISTRAME

Parc du Grand Troyes - Quartier Europe Centrale, 40 rue de Vienne - 10300 SAINTE-SAVINE  
Tél. : 03 25 71 25 83 - [infos@distrame.fr](mailto:infos@distrame.fr) - [www.distrame.fr](http://www.distrame.fr)